

PRESTIGE

Line

Evolution  
*Line*



# Wood & Pellet Products

Pocket  
01.2024 EN

 **NORDICA**<sup>®</sup>  
**Extraflame**

Warms up your life.



WARMS UP YOUR LIFE, FOR OVER 50 YEARS



DESIGN AND QUALITY, 100% MADE IN ITALY



CLEAN ENERGY, RESPECTING THE PLANET



A REAL SAVING ON THE BILLS



TESTED AND CERTIFIED PRODUCTS



FIND A DEALER, VISIT OUR WEBSITE:  
[www.lanordica-extraflame.com](http://www.lanordica-extraflame.com)

# I N D E X

## PELLET PRODUCTS

VENTILATED STOVES .....	2
DUCTED STOVES .....	5
HEATING STOVES .....	8
PELLET INSERTS .....	10
BOILERS .....	12



VENTILATED STOVES .....	14
DUCTED STOVES .....	26
HEATING STOVES .....	33



VENTILATED STOVES .....	35
DUCTED STOVES .....	42
HYBRID STOVES .....	47
HEATING STOVES .....	49
BOILERS .....	55
HOME CONTROL SOLUTION .....	58

## WOOD STOVES

HIGH PERFORMANCE .....	60
CAST IRON .....	62
EVERGREEN STOVES .....	65
HEATING STOVES .....	68
EVERGREEN COOKERS .....	70
COOKERS FOR INSERTION .....	75
THERMO-COOKERS .....	77
CAST IRON / CRYSTAL / WIDE INSERTS .....	78
MONOBLOCKS .....	81
CLOSED FIREPLACES .....	82



STOVES .....	83
COOKERS .....	92
FIREPLACES .....	96




STOVES .....	98
--------------	----

MAKING THE RIGHT CHOICE .....	102
PELLET PRODUCTS INDEX .....	103
WOOD-BURNING PRODUCTS INDEX .....	107
CERTIFICATES .....	110
LEGEND .....	111
ENERGY LABEL .....	111
COLOURS .....	111

TELL  
PELLET

STOVE  
SIZES

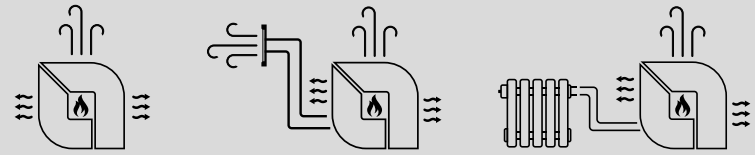

La Nordica-Extraflame ventilated pellet stoves are the ideal solution for transforming your room into a warm and welcoming place.

Our ducted pellet stoves are studied and designed to bring the hot air produced also in other rooms and allow you to easily manage temperatures, ignitions and time ranges.


By connecting it to your heating system, the thermo stoves become the beating heart of your home by heating the radiators ecologically and efficiently.



# VENTILATED PELLET STOVES



ALL THE HEAT YOUR ROOM NEEDS

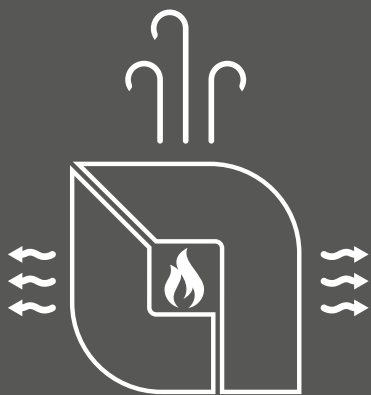

## LUISELLA (SLIM)

A+



Black

<b>kW-N (min-max)</b>	2,4 - 4,4
<b>% (min-max)</b>	94,4 - 91,9
<b>m<sup>3</sup></b>	126
<b>kg/h (min-max)</b>	0,5 - 1,0
<b>Dim. WxHxD</b>	572x892x307
<b>kg</b>	64
<b>Ø mm</b>	80 B/T
<b>W (min-max)</b>	27 - 34
<b>kg/ℓ</b>	~10 kg / ~16 ℓ



Bordeaux

## KETTYEVO 2.0

A+



White

<b>kW-N (min-max)</b>	2,5 - 6,5
<b>% (min-max)</b>	89,9 - 90,7
<b>m<sup>3</sup></b>	187
<b>kg/h (min-max)</b>	0,6 - 1,5
<b>Dim. WxHxD</b>	456x884x479
<b>kg</b>	77
<b>Ø mm</b>	80 B
<b>W (min-max)</b>	25 - 70
<b>kg/ℓ</b>	~15 kg / ~24 ℓ



Bordeaux

Black

Parchment \*

## GIUSYEVO 2.0

A+



White

<b>kW-N (min-max)</b>	3,0 - 7,0
<b>% (min-max)</b>	90,0 - 91,0
<b>m<sup>3</sup></b>	201
<b>kg/h (min-max)</b>	0,7 - 1,6
<b>Dim. WxHxD</b>	498x1022x490
<b>kg</b>	92
<b>Ø mm</b>	80 B/T
<b>W (min-max)</b>	35 - 60
<b>kg/ℓ</b>	~15 kg / ~24 ℓ



Bordeaux

Black

Parchment \*

\* While stocks last

# VENTILATED PELLET STOVES



## SERAFINA LUX EVO

A+



Bordeaux

**kW-N (min-max)** 2,5 - 8,0  
**% (min-max)** 92,5 - 91,3  
**m<sup>3</sup>** 230  
**kg/h (min-max)** 0,6 - 1,8  
**Dim. WxHxD** 502x1037x530  
**kg** 116  
**Ø mm** 80 B/T  
**W (min-max)** 25 - 60  
**kg/ℓ** ~15 kg / ~24 ℓ



White

## SERAFINA PETRA EVO

A+



Natural Stone

**kW-N (min-max)** 2,5 - 8,0  
**% (min-max)** 92,5 - 91,3  
**m<sup>3</sup>** 230  
**kg/h (min-max)** 0,6 - 1,8  
**Dim. WxHxD** 502x1037x530  
**kg** 131  
**Ø mm** 80 B/T  
**W (min-max)** 25 - 60  
**kg/ℓ** ~15 kg / ~24 ℓ

## AMIKA

(Air-tight)

A+



White

**kW-N (min-max)** 2,5 - 8,0  
**% (min-max)** 92,6 - 91,2  
**m<sup>3</sup>** 230  
**kg/h (min-max)** 0,6 - 1,8  
**Dim. WxHxD** 460x1200x465  
**kg** 121 - PT 124  
**Ø mm** 80 B  
**W (min-max)** 19 - 62  
**kg/ℓ** ~ 15 kg / ~ 24 ℓ



Black



Natural Stone (PT)

## KLAUDIA

A+



Ivory

**kW-N (min-max)** 2,5 - 8,0  
**% (min-max)** 92,5 - 91,3  
**m<sup>3</sup>** 230  
**kg/h (min-max)** 0,6 - 1,8  
**Dim. WxHxD** 498x1017x538  
**kg** 99  
**Ø mm** 80 B/T  
**W (min-max)** 25-60  
**kg/ℓ** ~15 kg / ~24 ℓ



Bordeaux



Black

# VENTILATED PELLET STOVES



## TEODORA EVO

A+



Black

<b>kW-N (min-max)</b>	2,5 - 8,0
<b>% (min-max)</b>	94,0 - 90,8
<b>m<sup>3</sup></b>	229
<b>kg/h (min-max)</b>	0,5 - 1,8
<b>Dim. WxHxD</b>	610x739x644
<b>kg</b>	139
<b>Ø mm</b>	80 B
<b>W (min-max)</b>	35 - 70
<b>kg/ℓ</b>	~14 kg / ~22 ℓ

## DAHIANA VFS

A+



Bordeaux

<b>kW-N (min-max)</b>	3,0 - 10,0
<b>% (min-max)</b>	90,2 - 91,0
<b>m<sup>3</sup></b>	287
<b>kg/h (min-max)</b>	0,7 - 2,3
<b>Dim. WxHxD</b>	525x1080x602
<b>kg</b>	157
<b>Ø mm</b>	80 B
<b>W (min-max)</b>	20 - 90
<b>kg/ℓ</b>	~30 kg / ~48 ℓ



Ivory

Bronze

Black

## TEOREMA

A+



Ivory

<b>kW-N (min-max)</b>	3,0 - 10,0
<b>% (min-max)</b>	90,2 - 91,0
<b>m<sup>3</sup></b>	287
<b>kg/h (min-max)</b>	0,7 - 2,3
<b>Dim. WxHxD</b>	525x1080x652
<b>kg</b>	165
<b>Ø mm</b>	80 mm B/T
<b>W (min-max)</b>	20 - 105
<b>kg/ℓ</b>	~30 kg / ~48 ℓ



Bordeaux

Black

## LUCIA

A+



White


<b>kW-N (min-max)</b>	3,6 - 12,1
<b>% (min-max)</b>	92,8 - 92,5
<b>m<sup>3</sup></b>	347
<b>kg/h (min-max)</b>	0,8 - 2,7
<b>Dim. WxHxD</b>	556x1097x597
<b>kg</b>	181 kg
<b>Ø mm</b>	80 B
<b>W (min-max)</b>	23 - 87
<b>kg/ℓ</b>	~27 kg / ~43 ℓ




Bordeaux

Taupe

# DUCTED PELLET STOVES



WARMTH IN EVERY ROOM

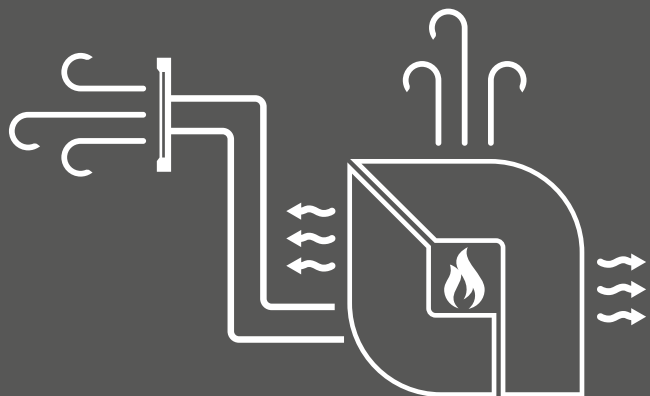

## GIUSY PLUS EVO 2.0

A+



White

<b>kW-N (min-max)</b>	3,0 - 7,5
<b>% (min-max)</b>	90,3 - 91,4
<b>m<sup>3</sup></b>	215
<b>kg/h (min-max)</b>	0,7 - 1,7
<b>Dim. WxHxD</b>	498x1022x490
<b>kg</b>	96
<b>Ø mm</b>	80 B/T
<b>W (min-max)</b>	55 - 90
<b>kg/ℓ</b>	~15 kg / ~24 ℓ



Bordeaux



Black

## KLAUDIA PLUS

A+



Ivory

<b>kW-N (min-max)</b>	2,5 - 8,0
<b>% (min-max)</b>	92,6 - 91,2
<b>m<sup>3</sup></b>	230
<b>kg/h (min-max)</b>	0,6 - 1,8
<b>Dim. WxHxD</b>	498x1017x538
<b>kg</b>	103
<b>Ø mm</b>	80 B/T
<b>W (min-max)</b>	42 - 85
<b>kg/ℓ</b>	~15 kg / ~24 ℓ



Bordeaux



Black

## MARILENA PLUS AD (SLIM)

A+



Natural Stone

<b>kW-N (min-max)</b>	3,7 - 8,0
<b>% (min-max)</b>	93,3 - 91,0
<b>m<sup>3</sup></b>	230
<b>kg/h (min-max)</b>	0,8 - 1,8
<b>Dim. WxHxD</b>	750x1077x352
<b>kg</b>	119 - PT 155
<b>Ø mm</b>	80 B/T/LH Side
<b>W (min-max)</b>	36 - 85
<b>kg/ℓ</b>	~15 kg / ~24 ℓ




White



Black



# DUCTED PELLET STOVES



## MARILENA PLUS AD CRYSTAL (SLIM)

A+



White

**kW-N (min-max)** 3,7 - 8,0  
**% (min-max)** 93,3 - 91,0  
**m<sup>3</sup>** 230  
**kg/h (min-max)** 0,8 - 1,8  
**Dim. WxHxD** 750x1077x352  
**kg** 135  
**Ø mm** 80 B/T/LH Side  
**W (min-max)** 36 - 85  
**kg/ℓ** ~15 kg / ~24 ℓ



Smoked

## ANNABELLA AD EVO (SLIM)

A+



White

**kW-N (min-max)** 3,4 - 9,0  
**% (min-max)** 93,5 - 91,9  
**m<sup>3</sup>** 258  
**kg/h (min-max)** 0,8 - 2,0  
**Dim. WxHxD** 703x1078x343  
**kg** 132  
**Ø mm** 80 B/T/RH Side  
**W (min-max)** 35 - 55  
**kg/ℓ** ~14 kg / ~22 ℓ



Black



Matt Taupe

## DAHIANA PLUS VFS

A+



Bordeaux

**kW-N (min-max)** 3,0 - 10,0  
**% (min-max)** 89,6 - 91,6  
**m<sup>3</sup>** 287  
**kg/h (min-max)** 0,7 - 2,3  
**Dim. WxHxD** 525x1080x602  
**kg** 160  
**Ø mm** 80 B  
**W (min-max)** 35 - 130  
**kg/ℓ** ~30 kg / ~48 ℓ



Ivory



Bronze



Black

## SOUVENIR STEEL EVO (SLIM)

A+



Bordeaux

**kW-N (min-max)** 3,4 - 10,2  
**% (min-max)** 93,0 - 90,8  
**m<sup>3</sup>** 293  
**kg/h (min-max)** 0,8 - 2,3  
**Dim. WxHxD** 821x1124x343  
**kg** 141  
**Ø mm** 80 B/T/RH Side  
**W (min-max)** 39 - 65  
**kg/ℓ** ~19 kg / ~30 ℓ




White



Black



# DUCTED PELLET STOVES



## SOUVENIR LUX EVO (SLIM)

A+



White

**kW-N (min-max)** 3,4 - 10,2  
**% (min-max)** 93,0 - 90,8  
**m<sup>3</sup>** 293  
**kg/h (min-max)** 0,8 - 2,3  
**Dim. WxHxD** 822x1162x343  
**kg** 149  
**Ø mm** 80 B/T/RH Side  
**W (min-max)** 39 - 65  
**kg/ℓ** ~19 kg / ~30 ℓ



Bordeaux

Taupe

## SOUVENIR PETRA EVO (SLIM)

A+



Natural Stone

**kW-N (min-max)** 3,4 - 10,2  
**% (min-max)** 93,0 - 90,8  
**m<sup>3</sup>** 293  
**kg/h (min-max)** 0,8 - 2,3  
**Dim. WxHxD** 821x1124x343  
**kg** 156  
**Ø mm** 80 B/T/RH Side  
**W (min-max)** 39 - 65  
**kg/ℓ** ~19 kg / ~30 ℓ

## TEOREMA PLUS

A+



Ivory

**kW-N (min-max)** 3,5 - 12,0  
**% (min-max)** 90,5 - 92,1  
**m<sup>3</sup>** 344  
**kg/h (min-max)** 0,8 - 2,7  
**Dim. WxHxD** 525x1080x652  
**kg** 177  
**Ø mm** 80 B/T  
**W (min-max)** 42 - 130  
**kg/ℓ** ~27 kg / ~43 ℓ



Bordeaux

Black

• Doble ducting system

## LUCIA PLUS

A+



White

**kW-N (min-max)** 3,6 - 12,0  
**% (min-max)** 91,7 - 91,6  
**m<sup>3</sup>** 344  
**kg/h (min-max)** 0,8 - 2,7  
**Dim. WxHxD** 556x1097x597  
**kg** 186  
**Ø mm** 80 B  
**W (min-max)** 50 - 142  
**kg/ℓ** ~27 kg / ~43 ℓ




Bordeaux

Taupe

• Doble ducting system

# PELLET HEATING STOVES

THE BEAUTY OF THE FIRE, THE POWER OF A BOILER

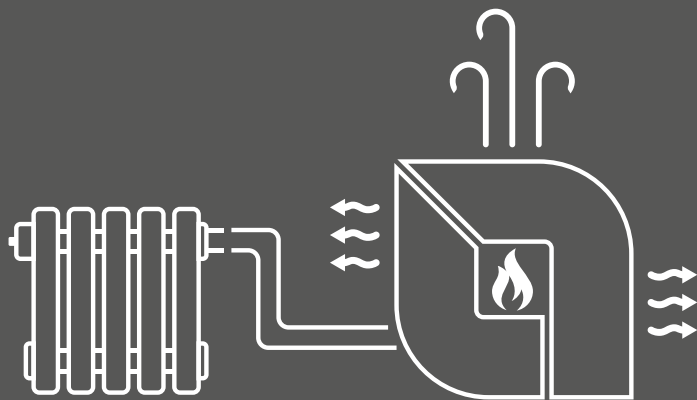

## MARINA IDRO H11

A+



<b>kW-N (min-max)</b>	4,2 - 14,8
<b>kW-H<sub>2</sub>O (min-max)</b>	3,0 - 11,0
<b>% (min-max)</b>	93,8 - 92,9
<b>m<sup>3</sup></b>	425
<b>kg/h (min-max)</b>	0,9 - 3,3
<b>Dim. WxHxD</b>	550x1039x601
<b>kg</b>	180
<b>Ø mm</b>	80 B
<b>W (min-max)</b>	32 - 65
<b>kg/ℓ</b>	~ 20 kg / ~ 32 ℓ
<b>bar</b>	3



## MARINA IDRO H13

A+



<b>kW-N (min-max)</b>	5,1 - 17,5
<b>kW-H<sub>2</sub>O (min-max)</b>	3,7 - 13,0
<b>% (min-max)</b>	94,2 - 92,4
<b>m<sup>3</sup></b>	502
<b>kg/h (min-max)</b>	1,1 - 3,8
<b>Dim. WxHxD</b>	550x1149x601
<b>kg</b>	190
<b>Ø mm</b>	80 B
<b>W (min-max)</b>	25 - 70
<b>kg/ℓ</b>	~ 24 kg / ~ 32 ℓ
<b>bar</b>	3



## VIRNA IDRO

A+

(Air-tight)



<b>kW-N (min-max)</b>	4,3 - 14,5
<b>kW-H<sub>2</sub>O (min-max)</b>	3,7 - 12,3
<b>% (min-max)</b>	95,2 - 93,0
<b>m<sup>3</sup></b>	415
<b>kg/h (min-max)</b>	0,9 - 3,2
<b>Dim. WxHxD</b>	793x1105x384
<b>kg</b>	151
<b>Ø mm</b>	100 B/T/RH Side
<b>W (min-max)</b>	65 - 80
<b>kg/ℓ</b>	~22 kg / ~35 ℓ
<b>bar</b>	2,5



# PELLET HEATING STOVES

## COSTANZA IDRO

A+

(Air-tight)



White

**kW-N (min-max)** 4,8 - 17,0  
**kW-H<sub>2</sub>O (min-max)** 2,7 - 12,0  
**% (min-max)** 92,2 - 91,9  
**m<sup>3</sup>** 487  
**kg/h (min-max)** 1,1 - 3,8  
**Dim. WxHxD** 495x1153x593  
**kg** 165  
**Ø mm** 100 B  
**W (min-max)** 70 - 100  
**kg/ℓ** ~ 27 kg / ~43 ℓ  
**bar** 3



Bordeaux

## ISIDE IDRO H15

A+



Bordeaux

**kW-N (min-max)** 5,4 - 18,1  
**kW-H<sub>2</sub>O (min-max)** 4,3 - 15,0  
**% (min-max)** 92,8 - 94,3  
**m<sup>3</sup>** 519  
**kg/h (min-max)** 1,2 - 4,0  
**Dim. WxHxD** 690x1196x628  
**kg** 255  
**Ø mm** 100 B  
**W (min-max)** 65 - 70  
**kg/ℓ** ~35 kg / ~56 ℓ  
**bar** 3



Parchment



White



Amethyst

## RAFFAELLA IDRO H15

A+



White

**kW-N (min-max)** 5,4 - 18,1  
**kW-H<sub>2</sub>O (min-max)** 4,3 - 15,0  
**% (min-max)** 92,8 - 94,3  
**m<sup>3</sup>** 519  
**kg/h (min-max)** 1,2 - 4,0  
**Dim. WxHxD** 633x1176x626  
**kg** 214  
**Ø mm** 100 B  
**W (min-max)** 65 - 70  
**kg/ℓ** ~ 35 kg / ~56 ℓ  
**bar** 3



Bordeaux



Grigio Luce

## RAFFAELLA IDRO H18

A+



Grigio Luce

**kW-N** 5,4 - 21,7  
**kW-H<sub>2</sub>O** 4,3 - 18,0  
**%** 92,8 - 93,8  
**m<sup>3</sup>** 623  
**kg/h** 1,2 - 4,8  
**Dim. WxHxD** 633x1176x626  
**kg** 214  
**Ø mm** 100 B  
**W** 65 - 70  
**kg/ℓ** ~35kg / ~56 ℓ  
**bar** 3



Ivory



# PELLET HEATING STOVES

## DIADEMA IDRO EVO

A+



<b>kW-N (min-max)</b>	8,0 - 28,0
<b>kW-H<sub>2</sub>O (min-max)</b>	6,0 - 24,1
<b>% (min-max)</b>	90,7 - 90,9
<b>m<sup>3</sup></b>	803
<b>kg/h (min-max)</b>	1,9 - 6,4
<b>Dim. WxHxD</b>	619x1304x698
<b>kg</b>	257
<b>Ø mm</b>	120 B
<b>W (min-max)</b>	100 - 120
<b>kg/ℓ</b>	~ 53 kg / ~84 ℓ
<b>bar</b>	2,5

# PELLET INSERTS


## COMFORT P70 AIR H49

A+

(Ventilated)



<b>kW-N (min-max)</b>	3,0 - 8,0
<b>% (min-max)</b>	92,6 - 91,4
<b>m<sup>3</sup></b>	230
<b>kg/h (min-max)</b>	0,7 - 1,8
<b>Dim. WxHxD</b>	680x480x512
<b>kg</b>	113
<b>Ø mm</b>	80 T
<b>W (min-max)</b>	25 - 95
<b>kg/ℓ</b>	~ 11 kg / ~18 ℓ




## COMFORT P70 AIR

A+

(Ventilated)




<b>kW-N (min-max)</b>	3,0 - 10,0
<b>% (min-max)</b>	90,4 - 90,9
<b>m<sup>3</sup></b>	287
<b>kg/h (min-max)</b>	0,7 - 2,2
<b>Dim. WxHxD</b>	670x530x561
<b>kg</b>	125
<b>Ø mm</b>	80 T
<b>W (min-max)</b>	23 - 75
<b>kg/ℓ</b>	~ 15 kg / ~24 ℓ

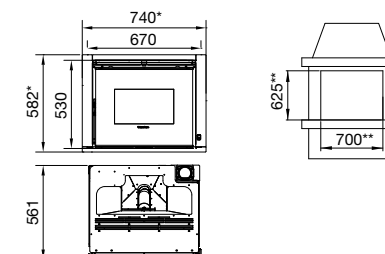

\* Dimensions with frame

\*\* Dimensions of compartment with pellet loading drawer

# PELLET INSERTS




## COMFORT P85

A+

(Ventilated)



<b>kW-N (min-max)</b>	3,5 - 12,0
<b>% (min-max)</b>	91,3 - 91,8
<b>m<sup>3</sup></b>	344
<b>kg/h (min-max)</b>	0,8 - 2,6
<b>Dim. WxHxD</b>	814x550x636
<b>kg</b>	145
<b>Ø mm</b>	80 T
<b>W (min-max)</b>	25 - 100
<b>kg/ℓ</b>	~ 16 kg / ~25 ℓ

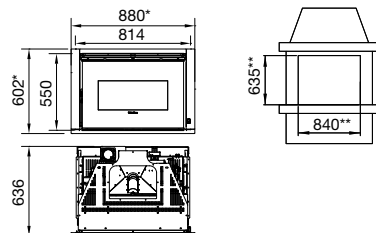


## COMFORT P70 AIR PLUS

A+

(Ducting system)



<b>kW-N (min-max)</b>	3,0 - 10,0
<b>% (min-max)</b>	91,5 - 92,2
<b>m<sup>3</sup></b>	287
<b>kg/h (min-max)</b>	0,7 - 2,2
<b>Dim. WxHxD</b>	670x530x562
<b>kg</b>	131
<b>Ø mm</b>	80 T
<b>W (min-max)</b>	35 - 105
<b>kg/ℓ</b>	~ 13 kg / ~21 ℓ

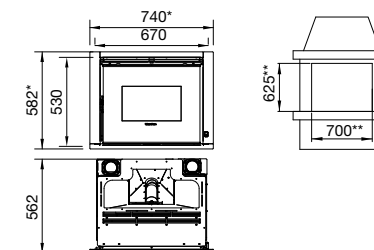


## COMFORT P85 PLUS

A+

(Ducting system)



<b>kW-N (min-max)</b>	3,5 - 12,0
<b>% (min-max)</b>	92,0 - 91,1
<b>m<sup>3</sup></b>	344
<b>kg/h (min-max)</b>	0,8 - 2,6
<b>Dim. WxHxD</b>	814x550x636
<b>kg</b>	160
<b>Ø mm</b>	80 T
<b>W (min-max)</b>	75 - 150
<b>kg/ℓ</b>	~ 16 kg / ~25 ℓ

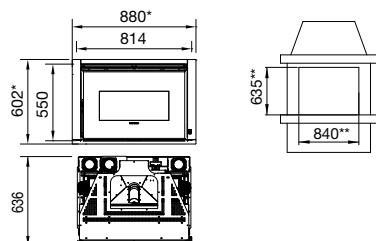


## COMFORT IDRO L80

A+

(Ventilated)




<b>kW-N (min-max)</b>	5,7 - 19,0
<b>kW-H<sub>2</sub>O (min-max)</b>	4,3 - 14,9
<b>% (min-max)</b>	91,6 - 90,4
<b>m<sup>3</sup></b>	545
<b>kg/h (min-max)</b>	1,3 - 4,3
<b>Dim. WxHxD</b>	821x648x608
<b>kg</b>	220
<b>Ø mm</b>	100 T
<b>W (min-max)</b>	80 - 100
<b>kg/ℓ</b>	~ 18 kg / ~29 ℓ
<b>bar</b>	2,5

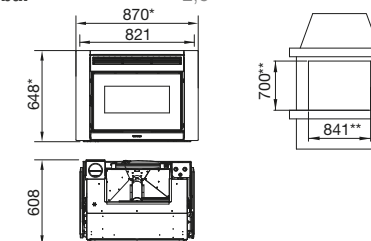


\* Dimensions with frame

\*\* Dimensions of compartment with pellet loading drawer

# PELLET BOILERS



A FORCE OF NATURE IN THE SERVICE OF YOUR HOME

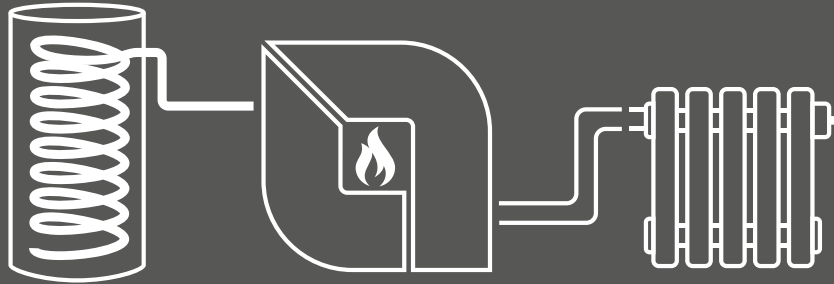

## PK15

A+



<b>kW-N (min-max)</b>	4,1 - 15,0
<b>kW-H<sub>2</sub>O (min-max)</b>	4,1 - 15,0
<b>% (min-max)</b>	87,7 - 93,0
<b>m<sup>3</sup></b>	430
<b>kg/h (min-max)</b>	1,0 - 3,4
<b>Dim. WxHxD</b>	822x1398x745
<b>kg</b>	295
<b>Ø mm</b>	100 B/LH Side
<b>W (min-max)</b>	60 - 65
<b>kg/ℓ</b>	~ 75 kg / ~ 119 ℓ
<b>bar</b>	3

## PK20

A+



<b>kW-N (min-max)</b>	5,7 - 20,0
<b>kW-H<sub>2</sub>O (min-max)</b>	5,7 - 20,0
<b>% (min-max)</b>	88,4 - 92,4
<b>m<sup>3</sup></b>	573
<b>kg/h (min-max)</b>	1,4 - 4,6
<b>Dim. WxHxD</b>	822 x 1398 x 745
<b>kg</b>	295
<b>Ø mm</b>	100 B/LH Side
<b>W (min-max)</b>	60 - 65
<b>kg/ℓ</b>	~ 75 kg / ~ 119 ℓ
<b>bar</b>	3

## PK30


A+



<b>kW-N (min-max)</b>	8,9 - 30,0
<b>kW-H<sub>2</sub>O (min-max)</b>	8,9 - 30,0
<b>% (min-max)</b>	92,7 - 92,4
<b>m<sup>3</sup></b>	860
<b>kg/h (min-max)</b>	2,0 - 6,8
<b>Dim. WxHxD</b>	892x1398x745
<b>kg</b>	310
<b>Ø mm</b>	120 B/LH Side
<b>W (min-max)</b>	70 - 85
<b>kg/ℓ</b>	~ 75 kg / ~ 119 ℓ
<b>bar</b>	3



# BOILERS AND THERMO PRODUCTS



**It is important to seek the guidance of a qualified technician who is able to recommend the most suitable type of boiler or heating device.**

By way of providing generic information, we highlight below the main information one must have in order to make an informed decision when choosing an appliance:

- Thermal requirements of the home
- Type of existing heating system: radiators, fan coil units, or radiant panels
- Type of distribution system: one-pipe, two-pipe or manifolds
- Indication of whether, in addition to heating, the boiler is also intended for the production of domestic hot water
- Any set-up for or installation of thermal solar collectors
- Most suitable type of storage: DHW storage tank or puffer

Accordingly, it is important to seek the guidance of a qualified technician who is able to perform a precise analysis of the system, provide explanations to any questions, including regulation requirements for installation, and recommend the most suitable type of boiler.

A correctly designed therefore guarantees:

- complete safety of one's home
- maximum comfort
- high yield of heat generator
- maximum savings
- less wear to the parts and therefore longer service life of the appliance



PRESTIGE

Line

PERFECT SYMBIOSIS

OF DESIGN

AND WARMTH

PERFECT


New 2024

**A+** | 5,1\*\* kW-N | 146\*\* m<sup>3</sup>

## CHARACTERISTICS



- Airtight stove
- The hearth can be removed by authorised service personnel
- FPC Plus function
- Easy Setup
- Easy Control
- Weekly chronothermostat



**Image referring to Peggy without pedestal**  
Cavity dimensions for product insertion (450x900 mm)

## OPTIONAL



**PEGGY WITH 'CLASSIC' PEDESTAL**  
Dimensions 545x720x570



**PEGGY WITH 'STYLE' PEDESTAL**  
Dimensions 514x720x570

## TECHNICAL DATA

**Nominal power (min-max)**  
2,5 - 5,1 kW-N \*\*

**Efficiency (min-max)**  
> 87,0 % \*\*

**Hourly consumption (min-max)**  
0,54 - 1,15 kg/h \*\*

**Dimensions (WxHxD)**  
500 x 620 x 570 \*\*


**Net weight**  
\*\* kg

**Smoke outlet diameter (Ø)**  
80 mm B \*\*

**Tank total capacity**  
~10 kg / ~16 l \*\*

**Electric consumption (min-max)**  
\*\* W

## TECHNOLOGY

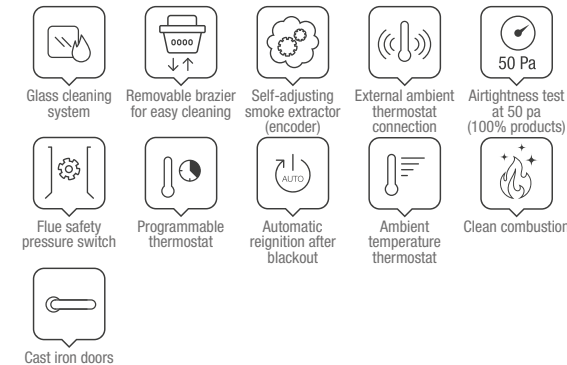

## ECODESIGN\*\*

Download  
Technical Sheet



SCAN ME



## COLOUR CHOICES

Painted steel and enamelled cast iron cladding



black

## STANDARD EQUIPMENT



**REMOTE CONTROL**  
Backlit IR touch remote control



**BLACK LCD**

\*\* Provisional data in phase of homologation



# LINA TOP

**Airtight**, ventilated pellet stove

PRESTIGE

Line

**A+** | 7,0 kW-N | 201 m<sup>3</sup>

## CHARACTERISTICS



- Output smoke outlet possibilities: rear, upper
- Radiant surface heat exchanger
- Extractable burn pot for easy cleaning
- Easy Control
- Easy Setup

## ECODESIGN



Download  
Technical Sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min-max)**  
2,5 - 7,0 kW-N

**Efficiency (min-max)**  
94,3 - 91,3 %

**Hourly consumption (min-max)**  
0,6 - 1,5 kg/h

**Dimensions (WxHxD)**  
478 x 914 x 522 mm

**Net weight**  
90 kg

**Smoke outlet diameter (Ø)**  
80 mm B/T

**Tank total capacity**  
~11 kg / ~18 l

**Electric consumption (min-max)**  
26 - 62 W

## TECHNOLOGY



## COLOUR CHOICES

High temperature painted steel covering



Black

## STANDARD EQUIPMENT



**REMOTE CONTROL**  
Backlit IR touch remote control



**BLACK LCD**

# SABRY 5.0

Ventilated pellet stove

PRESTIGE

Line

**A+** | 7,0 kW-N | 201 m<sup>3</sup>

## CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Radiant surface heat exchanger
- Ergonomic handle
- Extractable burn pot for easy cleaning
- Ceramic glow plug for quick ignition
- FPC PLUS - besides the work carried out by FPC, it allows abnormal situations to be noted by setting the generator in safe conditions.
- Easy Setup
- Easy Control

## ECODESIGN



Download  
Technical Sheet



SCAN ME

## TECHNICAL DATA

### Nominal power (min-max)

2,8 - 7,0 kW-N

### Efficiency (min-max)

94,5 - 90,8 %

### Hourly consumption (min-max)

0,6 - 1,6 kg/h

### Dimensions (WxHxD)

456 x 924 x 555 mm

### Net weight

87 kg

### Smoke outlet diameter (Ø)

80 mm B


### Tank total capacity

~15 kg / ~24 ℓ

### Electric consumption (min-max)

27 - 60 W

## TECHNOLOGY

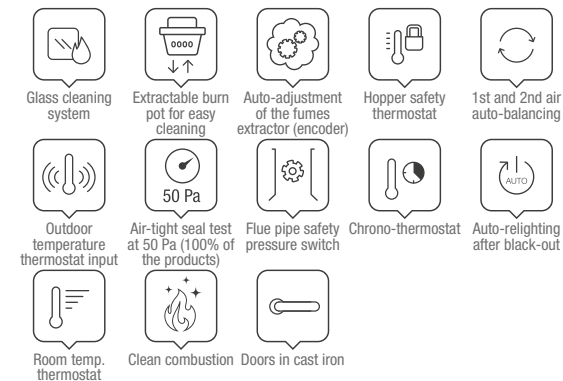

## COLOUR CHOICES

High temperature painted steel covering



Ivory

Black

Bronze

## STANDARD EQUIPMENT



### REMOTE CONTROL

Backlit IR touch remote control



### BLACK LCD

# MOIRA EVO

**Airtight**, ventilated pellet stove

PRESTIGE  
Line

**A+** | 7,0 kW-N | 201 m<sup>3</sup>

## CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Emergency module
- Extractable burn pot for easy cleaning

## ECODESIGN



Download  
Technical Sheet



SCAN ME



## TECHNICAL DATA

**Nominal power (min-max)**  
2,5 - 7,0 kW-N

**Efficiency (min-max)**  
94,3 - 91,3 %

**Hourly consumption (min-max)**  
0,6 - 1,5 kg/h

**Dimensions (WxHxD)**  
463 x 893 x 528 mm


**Net weight**  
84 kg

**Smoke outlet diameter (Ø)**  
80 mm B

**Tank total capacity**  
~11 kg / ~18 ℓ

**Electric consumption (min-max)**  
30 - 60 W

## TECHNOLOGY

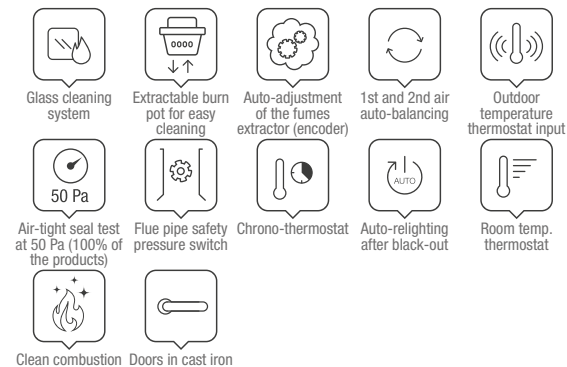

## COLOUR CHOICES

High temperature painted steel covering and majolica top cover



White

Black

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

**A+** | 7,0 kW-N | 201 m<sup>3</sup>

## CHARACTERISTICS



- Smoke discharge outlet option: upper
- Removable brazier for easy cleaning
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Control
- Easy Setup



Tab for opening the door

## ECODESIGN



Download technical data sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min. - max.)**  
2,5 - 7,0 kW-N

**Efficiency (min. - max.)**  
94,3 - 91,3 %

**Hourly consumption (min. - max.)**  
0,6 - 1,5 kg/h

**Dimensions (WxHxD)**  
506 x 897 x 525 mm

**Net weight**  
91 kg

**Smoke outlet diameter (Ø)**  
80 mm T

**Tank total capacity**  
~11 kg / ~18 l

**Electric consumption (min. - max.)**  
26 - 62 W

## TECHNOLOGY



## FINISHES

Painted steel two-tone cladding



White

Bronze

Black

## STANDARD EQUIPMENT



**RADIO REMOTE CONTROL**  
Radio remote control with "handheld device", with thermostat function

**CONSOLE WITH BUILT-IN WI-FI**  
("Total Control 3.0" app)



**A+** | 8,0 kW-N | 230 m<sup>3</sup>

## CHARACTERISTICS



- Smoke discharge outlet option: rear, upper
- Radiant surface heat exchanger
- Removable ash compartment
- Home automation integration with "Alexa" (Amazon). N.B. only with "Grey label" WiFi module – optional – and using the App Total Control 3.0. Service and "Alexa" device (Amazon) not included
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Easy Control
- Easy Setup

## ECODESIGN

Download technical data sheet



SCAN ME



## TECHNICAL DATA

**Nominal power (min. - max.)**

3,2 - 8,0 kW-N

**Efficiency (min. - max.)**

92,4 - 91,1 %

**Hourly consumption (min. - max.)**

0,7 - 1,8 kg/h

**Dimensions (WxHxD)**

496 x 1014 x 585 mm

**Net weight**

104 kg

**Smoke outlet diameter (Ø)**

80 mm B/T

**Tank total capacity**

~15 kg / ~24 ℓ

**Electric consumption (min. - max.)**

30 - 60 W

## TECHNOLOGY



Glass cleaning system



Removable brazier for easy cleaning



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

## FINISHES

Black painted steel cladding and ceramic or stone front panel



Black



Taupe



Natural stone

## STANDARD EQUIPMENT



**REMOTE CONTROL**

Backlit IR Touch remote control



**BLACK LCD**

**A+** | 8,0 kW-N | 230 m<sup>3</sup>

## CHARACTERISTICS



- Removable brazier for easy cleaning
- Removable ash compartment
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Setup
- Easy Control



Thick top

## ECODESIGN



Download technical data sheet



SCAN ME

## TECHNICAL DATA

Nominal power (min. - max.)

2,5 - 8,0 kW-N

Efficiency (min. - max.)

94,7 - 91,5 %

Hourly consumption (min. - max.)

0,5 - 1,8 kg/h

Dimensions (WxHxD)

507 x 1007 x 558 mm

Net weight

101 kg

Smoke outlet diameter (Ø)

80 mm B

Tank total capacity

~15 kg / ~24 ℓ

Electric consumption (min. - max.)

25 - 60 W

## TECHNOLOGY



Glass cleaning system



Removable brazier for easy cleaning



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

## FINISHES

Painted steel cladding



White



Black

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL


Radio remote control with "handheld device", with thermostat function



### CONSOLE WITH BUILT-IN WI-FI

("Total Control 3.0" app)

# ANGELA EVO

 Ventilated and **hermetic** pellet stove

PRESTIGE

Line

**A+** | 8,0 kW-N | 230 m<sup>3</sup>

## CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Emergency module
- Extractable burn pot for easy cleaning

## ECODESIGN



Download  
Technical Sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min-max)**  
2,5 - 8,0 kW-N

**Efficiency (min-max)**  
94,7 - 91,5 %

**Hourly consumption (min-max)**  
0,5 - 1,8 kg/h

**Dimensions (WxHxD)**  
490 x 1007 x 528 mm


**Net weight**  
93 kg

**Smoke outlet diameter (Ø)**  
80 mm B

**Tank total capacity**  
~15 kg / ~24 ℓ

**Electric consumption (min-max)**  
25 - 60 W

## TECHNOLOGY

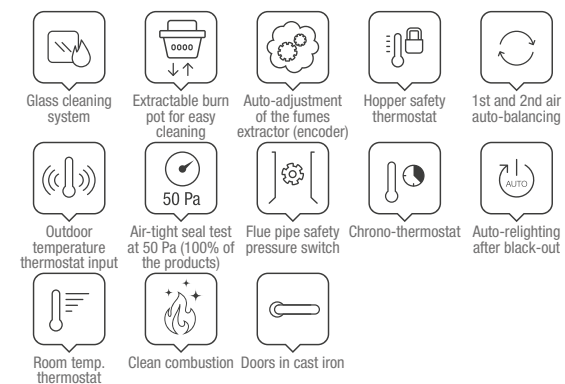

## COLOUR CHOICES

High temperature painted steel covering and majolica top cover



Black

White

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

# PAMELA STEEL


 Ventilated and **hermetic** pellet stove

PRESTIGE

Line

**A+** | 8,0 kW-N | 230 m<sup>3</sup>

## CHARACTERISTICS

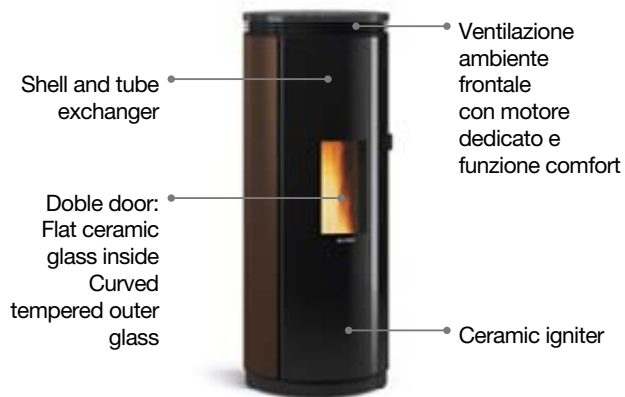

- Output smoke outlet possibilities: rear aligned
- Hearth, door fire and brazier in cast iron
- Emergency module
- Extractable burn pot for easy cleaning
- Extractable Ash compartment

## ECODESIGN



Download  
Technical Sheet



SCAN ME



## TECHNICAL DATA

**Nominal power (min-max)**  
2,5 - 8,0 kW-N

**Efficiency (min-max)**  
92,6 - 91,2 %

**Hourly consumption (min-max)**  
0,6 - 1,8 kg/h

**Dimensions (WxHxD)**  
470 x 1197 x 470 mm


**Net weight**  
130 kg

**Smoke outlet diameter (Ø)**  
80 mm B

**Tank total capacity**  
~15 kg / ~24 ℓ

**Electric consumption (min-max)**  
28 - 67 W

## TECHNOLOGY

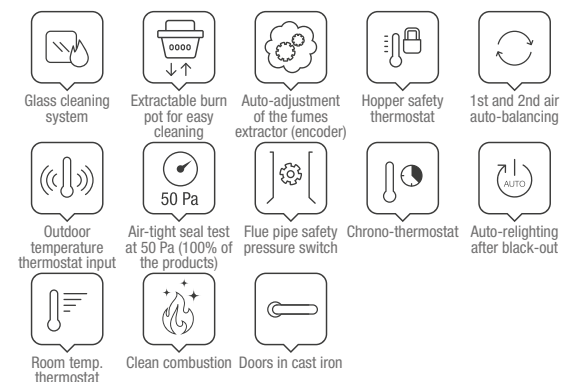

## COLOUR CHOICES

High temperature painted steel covering



Bronze

Taupe

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

## OPTIONAL



**Kit Glass Night View ROBOX®**




# PAMELA CRYSTAL - BLSC

**E** Airtight, ventilated pellet stove

PRESTIGE  
Line

**A+** | 8,0 kW-N | 230 m<sup>3</sup>

## CHARACTERISTICS

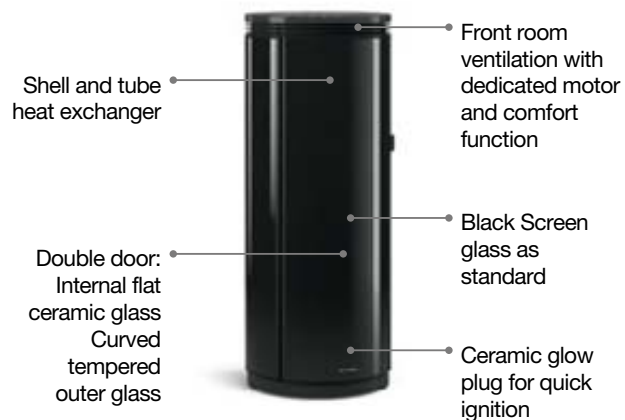

- Smoke discharge outlet option: rear on axis
- Cast iron door, hearth and brazier
- Emergency module
- Removable brazier for easy cleaning
- Removable ash compartment



## ECODESIGN



Download  
technical data sheet



SCAN ME



## TECHNICAL DATA

**Nominal power (min. - max.)**

2,5 - 8,0 kW-N

**Efficiency (min. - max.)**

92,6 - 91,2 %

**Hourly consumption (min. - max.)**

0,6 - 1,8 kg/h

**Dimensions (WxHxD)**

470 x 1197 x 470 mm

**Net weight**

140 kg

**Smoke outlet diameter (Ø)**

80 mm B

**Tank total capacity**

~15 kg / ~24 ℓ

**Electric consumption (min. - max.)**

28 - 67 W

## TECHNOLOGY



Glass cleaning system



Removable brazier for easy cleaning



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

## FINISHES

Tempered glass cladding



Crystal BLSC

## STANDARD EQUIPMENT




### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

**A+** | 9,0 kW-N | 258 m<sup>3</sup>

## CHARACTERISTICS

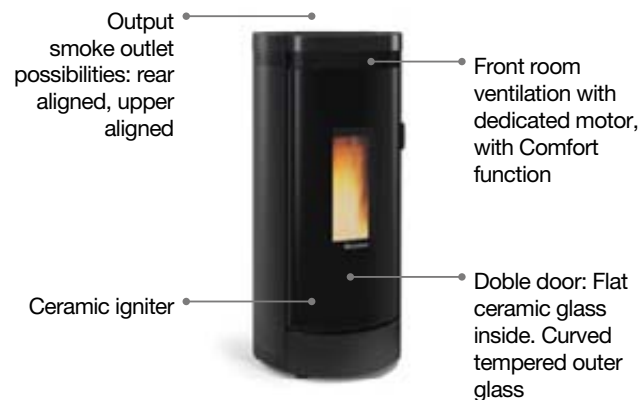

- Shell and tube exchanger
- T tube integrated in the product, inspectable from the rear
- Hearth, door fire and brazier in cast iron
- Emergency module
- Extractable burn pot for easy cleaning
- Extractable ash drawer

## ECODESIGN



Download  
Technical Sheet



SCAN ME



## TECHNICAL DATA

### Nominal power (min-max)

3,8 - 9,0 kW-N

### Efficiency (min-max)

92,2 - 92,7 %

### Hourly consumption (min-max)

0,9 - 2,0 kg/h

### Dimensions (WxHxD)

550 x 1200 x 573 mm

### Net weight

141 kg  
PT 167 kg

### Smoke outlet diameter (Ø)

80 mm B/T


### Tank total capacity

~18 kg / ~29 ℓ

### Electric consumption (min-max)

24 - 62 W

## TECHNOLOGY

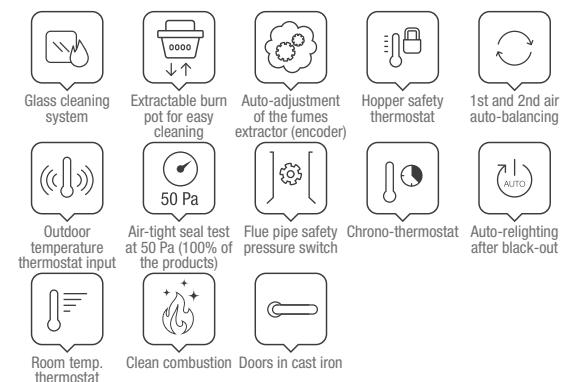

## COLOUR CHOICES

High temperature painted steel covering and majolica top cover or natural stone



White

Black

Natural stone (PT)

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

## OPTIONAL



### Kit Glass Night View ROBAX®

# MIRKA PLUS

Ducted pellet stove


PRESTIGE  
Line

**A+** | 8,0 kW-N | 230 m<sup>3</sup>

## CHARACTERISTICS



- Smoke discharge outlet option: rear, upper
- Ducting with dedicated motor up to 8 metres, thermostatically controlled and removable + AIR ZONE CONTROL
- Radiant surface heat exchanger
- Removable ash compartment
- Home automation integration with "Alexa" (Amazon). N.B. only with "Grey label" WiFi module – optional – and using the App Total Control 3.0. Service and "Alexa" device (Amazon) not included
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Easy Control
- Easy Setup

 UP TO 8 METRES OF DUCTS through one back output Ø80 (excludable)

## ECODESIGN



Download technical data sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min. - max.)**

3,2 - 8,0 kW-N

**Efficiency (min. - max.)**

92,5 - 91,0 %

**Hourly consumption (min. - max.)**

0,7 - 1,8 kg/h

**Dimensions (WxHxD)**

496 x 1014 x 585 mm

**Net weight**

108 kg

**Smoke outlet diameter (Ø)**

80 mm B/T


**Tank total capacity**

~15 kg / ~24 ℓ

**Electric consumption (min. - max.)**

45 - 96 W

## TECHNOLOGY

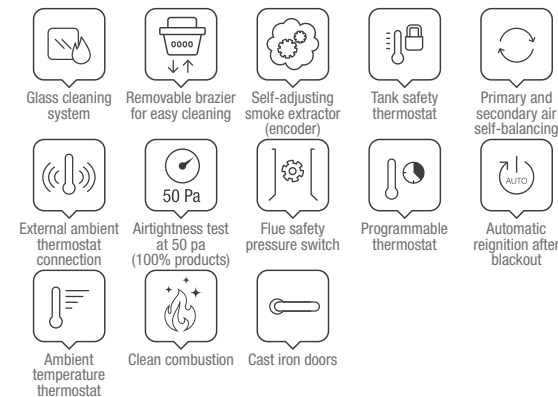

## FINISHES

Black painted steel cladding and ceramic or stone front panel



Black

Taupe

Natural stone

## STANDARD EQUIPMENT



**REMOTE CONTROL**  
Backlit IR Touch remote control



**BLACK LCD**

# ANGELA PLUS EVO

**E** Hermetic pellet stove with ducting system


PRESTIGE  
Line

**A+** | 8,0 kW-N | 230 m<sup>3</sup>

## CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Ducting system output possibilities (Ø80 mm): rear
- Emergency module
- Extractable burn pot for easy cleaning
- Extractable Ash compartment



UP TO 8 METRES OF DUCTS through one back output Ø80 (excludable)

## ECODESIGN



Download  
Technical Sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min-max)**  
2,5 - 8,0 kW-N

**Efficiency (min-max)**  
94,9 - 91,9 %

**Hourly consumption (min-max)**  
0,5 - 1,8 kg/h

**Dimensions (WxHxD)**  
490 x 1007 x 528 mm

**Net weight**  
98 kg

**Smoke outlet diameter (Ø)**  
80 mm B

**Tank total capacity**  
~15 kg / ~24 ℓ

**Electric consumption (min-max)**  
50 - 80 W

## TECHNOLOGY



Glass cleaning system



Extractable burn pot for easy cleaning



Auto-adjustment of the fumes extractor (encoder)



Hopper safety thermostat



1st and 2nd air auto-balancing



Outdoor temperature thermostat input



Air-tight seal test at 50 Pa (100% of the products)



Flue pipe safety pressure switch



Chrono-thermostat



Auto-re-lighting after black-out



Room temp. thermostat



Clean combustion



Doors in cast iron

## COLOUR CHOICES

High temperature painted steel covering and majolica top cover



White

Black

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



# ILARY PLUS TOP

**Airtight**, ducted pellet stove


PRESTIGE  
Line

**A+** | 8,0 kW-N | 230 m<sup>3</sup>

## CHARACTERISTICS



- Smoke discharge outlet option: upper
- Removable brazier for easy cleaning
- Removable ash compartment
- Shell and tube heat exchanger
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Setup
- Easy Control



UP TO 8 METRES OF DUCTS through one back output Ø80 (excludable)

## ECODESIGN



Download technical data sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min. - max.)**

2,5 - 8,0 kW-N

**Efficiency (min. - max.)**

94,9 - 91,9 %

**Hourly consumption (min. - max.)**

0,5 - 1,8 kg/h

**Dimensions (WxHxD)**

507 x 1007 x 558 mm

**Net weight**

105 kg

**Smoke outlet diameter (Ø)**

80 mm T

**Tank total capacity**

~15 kg / ~24 ℓ

**Electric consumption (min. - max.)**

45 - 75 W

## TECHNOLOGY



Glass cleaning system



Removable brazier for easy cleaning



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

## FINISHES

Painted steel cladding



White



Black

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

### CONSOLE WITH BUILT-IN WI-FI

("Total Control 3.0" app)


# GABRIELLA PLUS

**E** Tight and **hermetic** pellet stove with ducting system


PRESTIGE  
Line

**A+** | 8,0 kW-N | 230 m<sup>3</sup>

## CHARACTERISTICS

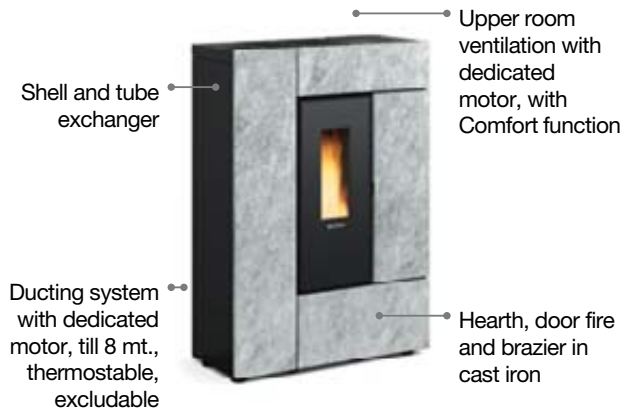

- Output smoke outlet possibilities: upper-backside, upper
- Extractable burn pot for easy cleaning
- Extractable Ash compartment



UP TO 8 METRES OF DUCTS through one back or left side output Ø80 (excludable)

## ECODESIGN



Download  
Technical Sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min-max)**  
3,5 - 8,0 kW-N

**Efficiency (min-max)**  
94,1 - 94,0 %

**Hourly consumption (min-max)**  
0,8 - 1,8 kg/h

**Dimensions (WxHxD)**  
750 x 1077 x 350 mm


**Net weight**  
132 kg  
PT 160 kg

**Smoke outlet diameter (Ø)**  
80 mm B/T

**Tank total capacity**  
~15 kg / ~24 ℓ

**Electric consumption (min-max)**  
50 - 90 W

## TECHNOLOGY

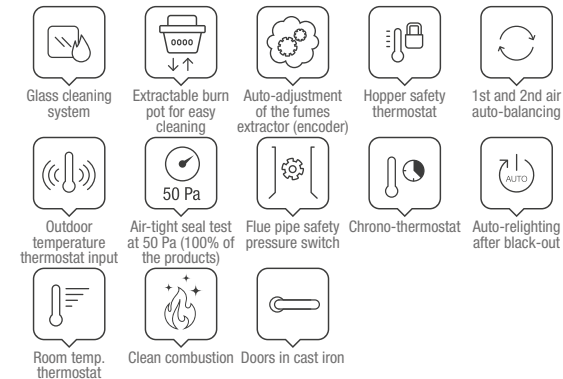

## COLOUR CHOICES

High temperature painted steel covering or natural stone



White

Bronze

Natural stone (PT)

## STANDARD EQUIPMENT



**REMOTE CONTROL**  
Backlit IR touch remote control



**BLACK LCD**

# DEBBY PLUS EVO


**E** Airtight, ducted pellet stove

PRESTIGE

Line

**A+** | 9,0 kW-N | 258 m<sup>3</sup>

## CHARACTERISTICS

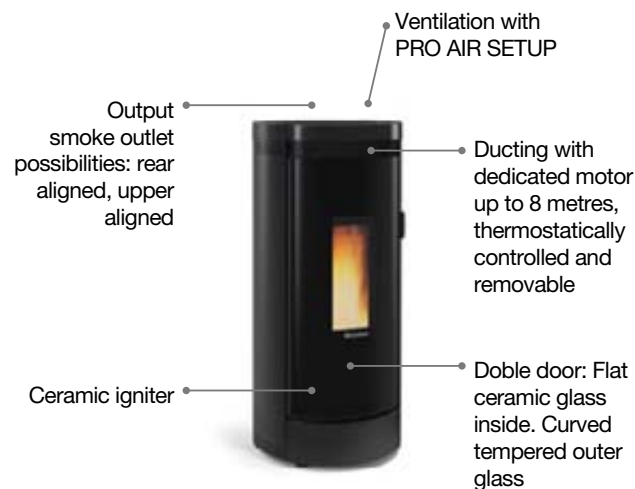

- Shell and tube exchanger
- T tube integrated in the product, inspectable from the rear
- Hearth, door fire and brazier in cast iron
- Safety button
- Extractable ash drawer
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- FPC PLUS - besides the work carried out by FPC, it allows abnormal situations to be noted by setting the generator in safe conditions.
- With AIR ZONE CONTROL (AZC), the speed of rotation of the ducted fan is controlled in order to maximise the transmission of thermal power in the ducted environment.

## ECODESIGN



Download  
Technical Sheet



SCAN ME



## TECHNICAL DATA

**Nominal power (min-max)**  
3,8 - 9,0 kW-N

**Efficiency (min-max)**  
92,2 - 92,7 %

**Hourly consumption (min-max)**  
0,7 - 2,0 kg/h

**Dimensions (WxHxD)**  
550 x 1199 x 573 mm


**Net weight**  
137 kg  
PT 163 kg

**Smoke outlet diameter (Ø)**  
80 mm B/T

**Tank total capacity**  
~18 kg / ~29 ℓ

**Electric consumption (min-max)**  
45 - 92 W

## TECHNOLOGY

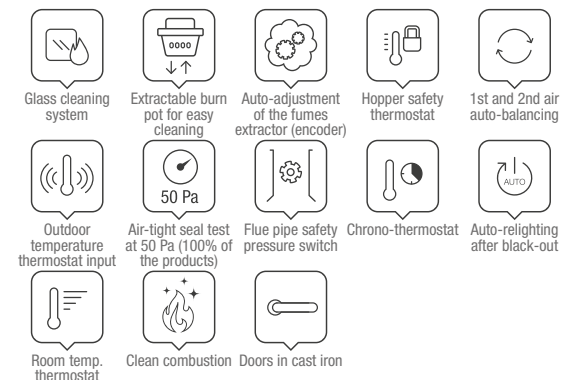

## COLOUR CHOICES

High temperature painted steel covering and majolica top cover or natural stone



White

Black

Natural stone (PT)

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

## OPTIONAL



**Kit Glass Night View ROBOX®**

# SHARON PLUS

 Tight and **hermetic** pellet stove with ducting system

PRESTIGE  
Line

**A+** | 10,0 kW-N | 287 m<sup>3</sup>

## CHARACTERISTICS



- Extractable burn pot for easy cleaning
- Output smoke outlet possibilities: rear, upper
- Ducting system output possibilities (Ø80 mm): rear
- Radiant surface heat exchanger
- Double door: Glass ceramic external door
- Wide fire vision
- Reduced depth (slim)
- Emergency module
- Ash compartment
- Door fire and brazier in cast iron
- With the AUTOMATIC function activated, the stove manages the power output so that the room temperature set by the user remains constant. This minimises power fluctuations to the benefit of thermal and acoustic comfort
- With AIR ZONE CONTROL (AZC) the speed of rotation of the ducting fan is managed with the aim of maximising the transmission of thermal power in the ducted environment

## ECODESIGN



Download  
Technical Sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min-max)**  
3,5 - 10,0 kW-N

**Efficiency (min-max)**  
91,7 - 91,0 %

**Hourly consumption (min-max)**  
0,8 - 2,3 kg/h

**Dimensions (WxHxD)**  
900 x 1150 x 290 mm


**Net weight**  
155 kg - PT 167 kg

**Smoke outlet diameter (Ø)**  
80mm B/T

**Tank total capacity**  
~21 kg / ~33 ℓ

**Electric consumption (min-max)**  
30 - 50 W

## TECHNOLOGY

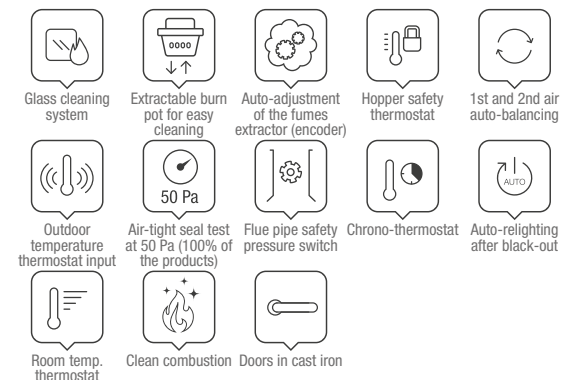

## COLOUR CHOICES

Glass or natural stone covered



Crystal

Natural stone (PT)

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

## OPTIONAL

### KIT DUCTING

Right side ducting kit





# SHARON PLUS STEEL


**E** Airtight, ducted, slim pellet stove

PRESTIGE

Line

**A+** | 10,0 kW-N | 287 m<sup>3</sup>

## CHARACTERISTICS

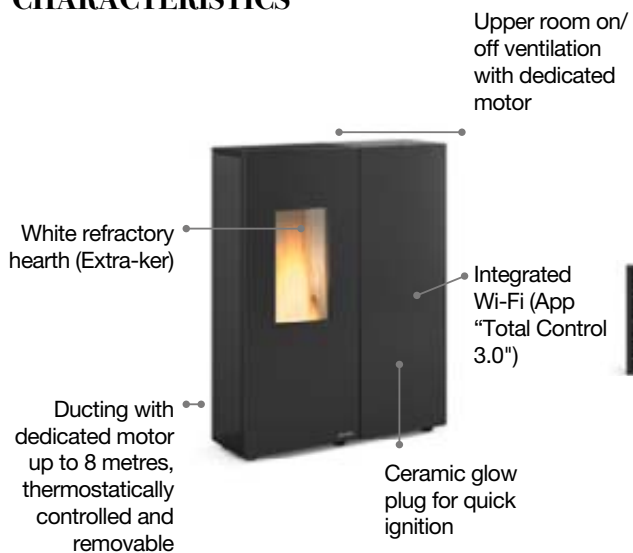

- Removable brazier for easy cleaning
- Smoke discharge outlet option: rear, upper
- Ducting outlet options (Ø80 mm): rear
- Radiant surface heat exchanger
- Double door
- Wide view of the flame
- Reduced depth
- Emergency module
- Ash compartment
- Cast iron door and brazier
- With the AUTOMATIC function activated, the stove manages the power output so that the room temperature set by the user remains constant. This minimises power fluctuations to the benefit of thermal and acoustic comfort
- With AIR ZONE CONTROL (AZC) the speed of rotation of the ducting fan is managed with the aim of maximising the transmission of thermal power in the ducted environment

## ECODESIGN



Download technical data sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min. - max.)**

3,5 - 10,0 kW-N

**Efficiency (min. - max.)**

91,7 - 91,0 %

**Hourly consumption (min. - max.)**

0,8 - 2,3 kg/h

**Dimensions (WxHxD)**

900 x 1150 x 295 mm

**Net weight**

155 kg

**Smoke outlet diameter (Ø)**

80 mm B/T

**Tank total capacity**

~21 kg / ~33 ℓ

**Electric consumption (min. - max.)**

30 - 50 W

## TECHNOLOGY



Glass cleaning system



Removable brazier for easy cleaning



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

## FINISHES

Painted steel cladding



Black

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

## OPTIONAL

### KIT DUCTING

Right side ducting kit



**A+** | 14,2 kW-N | 11,0 kW-H<sub>2</sub>O | 407 m<sup>3</sup>

## CHARACTERISTICS



- Pressure transducer and display pressure value indication
- Output smoke outlet possibilities: rear
- Safety valve 3 bar
- Combustion chamber in thick steel
- Air relief valve
- Ergonomic handle
- Door fire and brazier in cast iron
- Thermal and pressure safety
- Expansion tank
- Extractable ash drawer

## ECODESIGN



Download  
Technical Sheet



SCAN ME



## TECHNICAL DATA

**Nominal power (min-max)**  
4,1 - 14,2 kW-N

**Power given back to water (min-max)**  
2,9 - 11,0 kW-H<sub>2</sub>O

**Efficiency (min-max)**  
92,9 - 91,1 %

**Hourly consumption (min-max)**  
0,9 - 3,2 kg/h

**Dimensions (WxHxD)**  
511 x 1150 x 632 mm

**Net weight**  
163 kg


**Smoke outlet diameter (Ø)**  
100 mm B

**Tank total capacity**  
~27 kg / ~43 ℓ

**Electric consumption (min-max)**  
65 - 95 W

**Working pressure (bar)**  
3 bar

## TECHNOLOGY

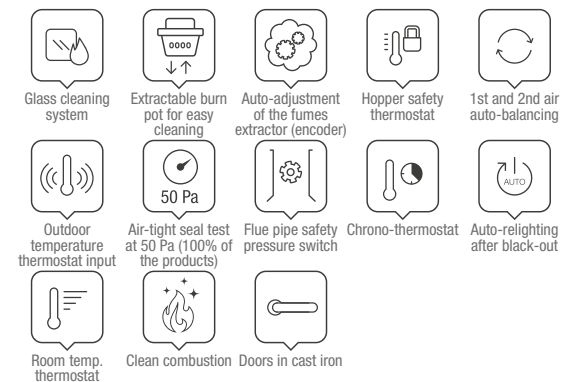

## COLOUR CHOICES

High temperature painted steel covering and majolica top cover



## STANDARD EQUIPMENT



**REMOTE CONTROL**  
Backlit IR touch remote control



**BLACK LCD**

Evolution  
*line*

THE TECHNOLOGICAL


REVOLUTION OF HEAT



EV  
EN  
TI  
LA  
TE

PE  
LL  
TE  
S  
VO  
S  
SE

Evolution  
*Life*

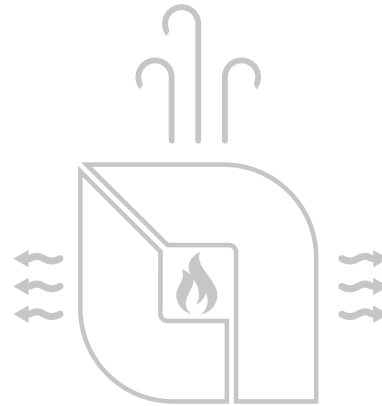

Totally Air-tight

Home control Solution



### AIR-TIGHT

**SAFE:** Air-tight combustion chamber and tank:  
**technology** and innovation at the service of your safety



### THE LATEST GENERATION IGNITION SYSTEM

**FAST:** For immediate warmth in your home, always and everywhere



### HOME CONTROL SOLUTION

**INNOVATIVE:** Always in contact with your stove, even when you are away from home



### OPTIMISED COMBUSTION

**EFFICIENT:** Reduces the waiting time for relighting, ensuring optimal combustion



### SELF-CLEANING BRAZIER

**CONVENIENT:** your stove cleans itself



### CONTROL WITH MULTI-FUNCTION RADIO REMOTE CONTROL HANDHELD DEVICE

**AGILE:** All the control functions of the stove, but also with a remote thermostat





# MIETTA EVO

 Ventilated and **hermetic** pellet stove

Evolution  
*Life*

**A+** | 9,0 kW-N | 258 m<sup>3</sup>

## CHARACTERISTICS



- Shell and tube exchanger
- Output smoke outlet possibilities: rear
- Combustion chamber probe
- Hearth, door fire and brazier in cast iron
- Emergency module
- Extractable ash drawer
- Possibility to select the power even into the individual slot of chrono

## ECODESIGN



Download  
Technical Sheet



SCAN ME



## TECHNICAL DATA

**Nominal power (min-max)**

3,4 - 9,0 kW-N

**Efficiency (min-max)**

93,9 - 93,1 %

**Hourly consumption (min-max)**

0,8 - 2,0 kg/h

**Dimensions (WxHxD)**

496 x 1073 x 579 mm

**Net weight**

157 kg

**Smoke outlet diameter (Ø)**

80 mm B

**Tank total capacity**

~20 kg / ~32 ℓ

**Electric consumption (min-max)**

26 - 43 W

## TECHNOLOGY



Glass cleaning system



Auto-adjustment of the fumes extractor (encoder)



Hopper safety thermostat



1st and 2nd air auto-balancing



Outdoor temperature thermostat input



Air-tight seal test at 50 Pa (100% of the products)



Flue pipe safety pressure switch



Chrono-thermostat



Auto-relighting after black-out



Room temp. thermostat



Clean combustion



Doors in cast iron

## COLOUR CHOICES

High temperature painted steel covering and majolica top cover



Bordeaux



White

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function

# KATIA 9

**E** Airtight, ventilated pellet stove

Evolution  
*Life*

**A+** | 9,0 kW-N | 258 m<sup>3</sup>

## CHARACTERISTICS



- Shell and tube heat exchanger
- Cast iron door, hearth and brazier
- Double glass door
- Combustion chamber probe
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Setup
- Easy Control




Curved ceramic glass

## ECODESIGN



Download technical data sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min. - max.)**

3,4 - 9,0 kW-N

**Efficiency (min. - max.)**

93,9 - 93,1 %

**Hourly consumption (min. - max.)**

0,8 - 2,0 kg/h

**Dimensions (WxHxD)**

515 x 1082 x 572 mm

**Net weight**

155 kg

**Smoke outlet diameter (Ø)**

80 mm B


**Tank total capacity**

~20 kg / ~32 ℓ

**Electric consumption (min. - max.)**

26 - 43 W

## TECHNOLOGY

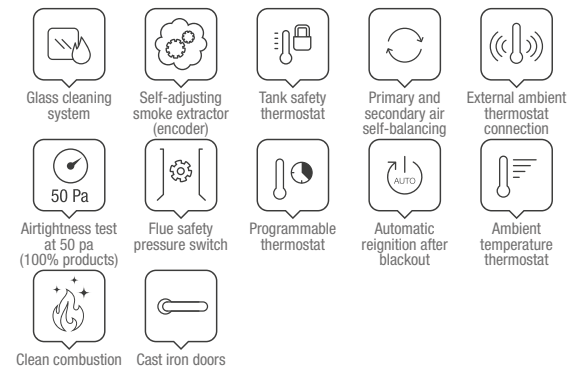

## FINISHES

Painted steel cladding



White

Bronze

Taupe

## STANDARD EQUIPMENT

### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



### CONSOLE WITH BUILT-IN WI-FI

("Total Control 3.0" app)



# KATIA 11

**E** Airtight, ventilated pellet stove

Evolution  
*Life*

**A+** | 11,0 kW-N | 315 m<sup>3</sup>

## CHARACTERISTICS



- Shell and tube heat exchanger
- Cast iron door, hearth and brazier
- Double glass door
- Combustion chamber probe
- Room temperature control with AUTOMATIC function
- Home automation integration with "Alexa"
- Easy Setup
- Easy Control



Curved ceramic glass

## ECODESIGN



Download  
technical data sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min. - max.)**

3,4 - 11,0 kW-N

**Efficiency (min. - max.)**

93,9 - 91,4 %

**Hourly consumption (min. - max.)**

0,8 - 2,5 kg/h

**Dimensions (WxHxD)**

515 x 1082 x 572 mm

**Net weight**

155 kg

**Smoke outlet diameter (Ø)**

80 mm B


**Tank total capacity**

~20 kg / ~32 ℓ

**Electric consumption (min. - max.)**

26 - 45 W

## TECHNOLOGY

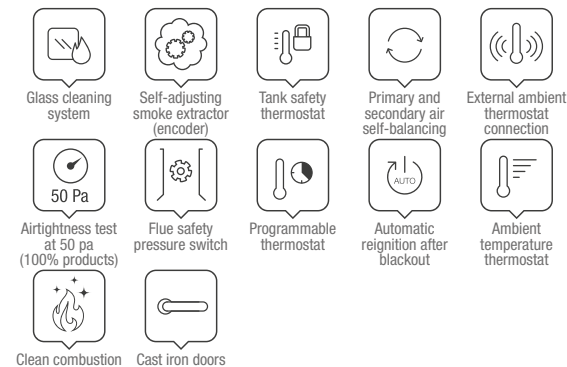

## FINISHES

Painted steel cladding



White

Bronze

Taupe

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



**CONSOLE WITH BUILT-IN WI-FI**  
("Total Control 3.0" app)

**A+** | 11,0 kW-N | 315 m<sup>3</sup>

## CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Shell and tube exchanger
- Combustion chamber probe
- Hearth, door fire and brazier in cast iron
- Emergency module
- Single door with double glass ceramic
- Extractable burn pot for easy cleaning
- Extractable ash drawer
- Removable handle with storage compartment

## ECODESIGN



Download  
Technical Sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min-max)**  
3,4 - 11,0 kW-N

**Efficiency (min-max)**  
93,9 - 91,4 %

**Hourly consumption (min-max)**  
0,8 - 2,5 kg/h

**Dimensions (WxHxD)**  
480 x 1140 x 560 mm


**Net weight**  
173 kg

**Smoke outlet diameter (Ø)**  
80 mm B

**Tank total capacity**  
~22 kg / ~35 l

**Electric consumption (min-max)**  
25 - 45 W

## TECHNOLOGY

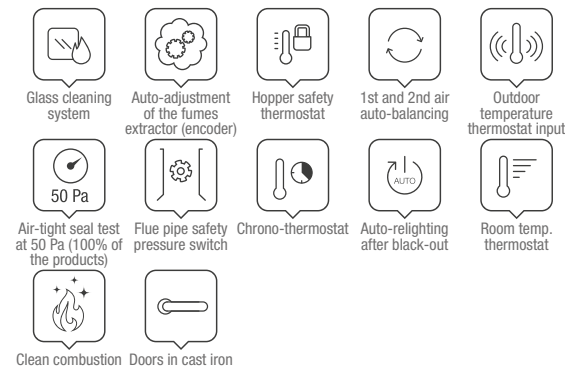

## COLOUR CHOICES

Painted steel covered, top and bottom in majolica



White

Bright taupe

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



**A+** | 12,0 kW-N | 344 m<sup>3</sup>

## CHARACTERISTICS



- Cast iron door, hearth and brazier
- Extractable ash drawer
- Combustion chamber probe
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Home automation integration with “Alexa” (Amazon).N.B. only with “Grey label” WiFi module – optional – and using the App Total Control 3.0. Service and “Alexa” device (Amazon) not included
- Easy Setup
- Easy Control

## ECODESIGN



Download technical data sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min. - max.)**

3,6 - 12,0 kW-N

**Efficiency (min. - max.)**

93,0 - 91,4 %

**Hourly consumption (min. - max.)**

0,8 - 2,7 kg/h

**Dimensions (WxHxD)**

576 x 1174 x 642 mm

**Net weight**

188 kg

**Smoke outlet diameter (Ø)**

80 mm B


**Tank total capacity**

~29 kg / ~46 l

**Electric consumption (min. - max.)**

45 - 58 W

## TECHNOLOGY

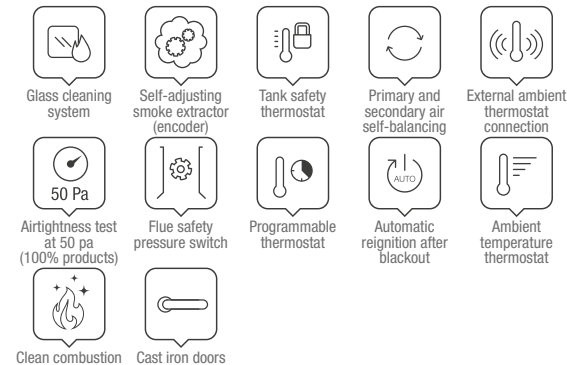

## FINISHES

Painted steel cladding



White

Bronze

Matt Taupe

## STANDARD EQUIPMENT



**REMOTE CONTROL**

Backlit IR Touch remote control



**BLACK LCD**

**A+** | 12,0 kW-N | 344 m<sup>3</sup>

## CHARACTERISTICS



- Cast iron door, hearth and brazier
- Extractable ash drawer
- Combustion chamber probe
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Home automation integration with “Alexa” (Amazon).N.B. only with “Grey label” WiFi module – optional – and using the App Total Control 3.0. Service and “Alexa” device (Amazon) not included
- Easy Setup
- Easy Control

## ECODESIGN



Download technical data sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min. - max.)**

3,6 - 12,0 kW-N

**Efficiency (min. - max.)**

93,0 - 91,4 %

**Hourly consumption (min. - max.)**

0,8 - 2,7 kg/h

**Dimensions (WxHxD)**

576 x 1174 x 642 mm

**Net weight**

201 kg

**Smoke outlet diameter (Ø)**

80 mm B

**Tank total capacity**

~29 kg / ~46 l

**Electric consumption (min. - max.)**

45 - 58 W

## TECHNOLOGY



## FINISHES

Majolica and painted steel cladding



White

Taupe

## STANDARD EQUIPMENT



**REMOTE CONTROL**


Backlit IR Touch remote control



**BLACK LCD**

TELEPHONE  
D E F E C T S  
D E T E C T I O N  
S E R V I C E

Evolution  
*Life*

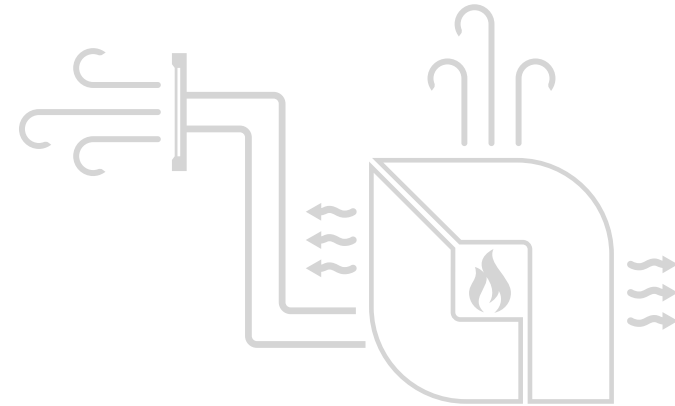

The product range with one or more motors dedicated to thermostable duct heating.

UP TO 8 METRES

PER DUCT



### AIR-TIGHT STOVE

**SAFE:** Technology and innovation at the service of your safety.



### HOME CONTROL SOLUTION

**INNOVATIVE:** Always in contact with your stove, even when you are away from home

# ANNALISA PLUS

**E** Airtight, double ducted pellet stove

Evolution  
*Life*

New 2024


**A+** | 12,0\*\* kW-N | 344\*\* m<sup>3</sup>

Download  
technical data sheet



SCAN ME

## CHARACTERISTICS

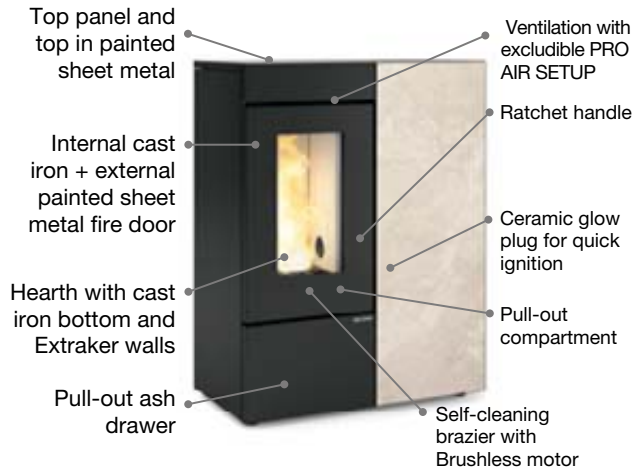

- Airtight stove
- FPC Plus function
- AIR ZONE CONTROL with excludable ducting
- Automatic Mode
- Wi-Fi as standard with 'Total Control 3.0' app
- Easy Setup
- Easy Control
- Weekly chronothermostat
- Combustion chamber probe
- 2 dedicated ducting motors: max. length 8 metres, power output at least 1.3 kW each (with P5 power)
- Top / rear / left side / right side ducting outlet.  
N.B. Possible to have a left and a right duct or other different 'mixed' solutions



UP TO 16 METRES (8m for 2 outputs) OF DUCTS

## ECODESIGN\*\*



## TECHNICAL DATA

Nominal power (min. - max.)  
3,6 - 12,0 kW-N \*\*

Efficiency (min. - max.)  
> 88% \*\*

Hourly consumption (min. - max.)  
2,7 kg/h \*\*

Dimensions (WxHxD)  
900 x 1150 x 420 mm \*\*

Net weight  
\*\* kg

Smoke outlet diameter (Ø)  
80 mm B/T/RH side \*\*

Tank total capacity  
~24 kg / ~38 ℓ \*\*

Electric consumption (min. - max.)  
\*\* W

## TECHNOLOGY



Glass cleaning system



Self-adjusting smoke extractor (encoder)



External ambient thermostat connection



Airtightness test at 50 Pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

## FINISHES

Painted steel cladding and Crystal or Stoneware front panel



Crystal



Gres Ostuni

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



### CONSOLE WITH BUILT-IN WI-FI

("Total Control 3.0" app)



# NORIS PLUS



Airtight, double ducted pellet stove

Evolution  
*Life*

**A+** | 12,0 kW-N | 344 m<sup>3</sup>

## CHARACTERISTICS



- Cast iron door, hearth and brazier
- Extractable ash drawer
- Brushless gear motor for pellet loading
- Combustion chamber probe
- AIR ZONE CONTROL function for ducting
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Home automation integration with “Alexa” (Amazon).N.B. only with “Grey label” WiFi module – optional – and using the App Total Control 3.0. Service and “Alexa” device (Amazon) not included
- Easy Setup
- Easy Control



UP TO 16 METRES (8m for 2 outputs) OF DUCTS

## ECODESIGN



Download  
technical data sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min. - max.)**

3,6 - 12,0 kW-N

**Efficiency (min. - max.)**

93,4 - 91,8 %

**Hourly consumption (min. - max.)**

0,8 - 2,7 kg/h

**Dimensions (WxHxD)**

576 x 1174 x 642 mm

**Net weight**

195 kg

**Smoke outlet diameter (Ø)**

80 mm B

**Tank total capacity**

~29 kg / ~46 l

**Electric consumption (min. - max.)**

60 - 105 W

## TECHNOLOGY



Glass cleaning system



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

## FINISHES

Painted steel cladding



White



Bronze



Matt Taupe

## STANDARD EQUIPMENT



**REMOTE CONTROL**

Backlit IR Touch remote control



**BLACK LCD**

# NORIS PLUS LUX

**E** Airtight, double ducted pellet stove

Evolution  
*Life*

**A+** | 12,0 kW-N | 344 m<sup>3</sup>

## CHARACTERISTICS

Double ducting with two dedicated motors up to 8 metres, thermostatically controlled and removable + AIR ZONE CONTROL

Ceramic glow plug for quick ignition



Ventilation and ducting with PRO AIR SET UP, both excludable

Self-cleaning brazier with Brushless motor

- Cast iron door, hearth and brazier
- Extractable ash drawer
- Brushless gear motor for pellet loading
- Combustion chamber probe
- AIR ZONE CONTROL function for ducting
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- Home automation integration with “Alexa” (Amazon).N.B. only with “Grey label” WiFi module – optional – and using the App Total Control 3.0. Service and “Alexa” device (Amazon) not included
- Easy Setup
- Easy Control



UP TO 16 METRES (8m for 2 outputs) OF DUCTS

## ECODESIGN



Download technical data sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min. - max.)**

3,6 - 12,0 kW-N

**Efficiency (min. - max.)**

93,4 - 91,8 %

**Hourly consumption (min. - max.)**

0,8 - 2,7 kg/h

**Dimensions (WxHxD)**

576 x 1174 x 642 mm

**Net weight**

208 kg

**Smoke outlet diameter (Ø)**

80 mm B

**Tank total capacity**

~29 kg / ~46 l

**Electric consumption (min. - max.)**

60 - 105 W

## TECHNOLOGY



Glass cleaning system



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

## FINISHES

Majolica and painted steel cladding



White



Taupe

## STANDARD EQUIPMENT



**REMOTE CONTROL**

Backlit IR Touch remote control



**BLACK LCD**

# TERRY PLUS

**E** Hermetic pellet stove with ducting system and two different outlets


Evolution  
*Life*

**A+** | 12,1 kW-N | 347 m<sup>3</sup>

## CHARACTERISTICS



- Output smoke outlet possibilities: rear
- Ducting system output possibilities (Ø80 mm): rear
- Front room ventilation with dedicated motor, with Comfort function
- Extractable hearth (only by authorized assistance)
- Hearth, door fire and brazier in cast iron
- Ergonomic handle
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Emergency module
- Extractable ash drawer



## ECODESIGN

Download  
Technical Sheet



SCAN ME



## TECHNICAL DATA

**Nominal power (min-max)**  
3,5 - 12,1 kW-N

**Efficiency (min-max)**  
92,0 - 94,0 %

**Hourly consumption (min-max)**  
0,8 - 2,7 kg/h

**Dimensions (WxHxD)**  
569 x 1151 x 598 mm


**Net weight**  
206 kg

**Smoke outlet diameter (Ø)**  
80 mm B

**Tank total capacity**  
~29 kg / ~46 l

**Electric consumption (min-max)**  
50 - 96 W

## TECHNOLOGY

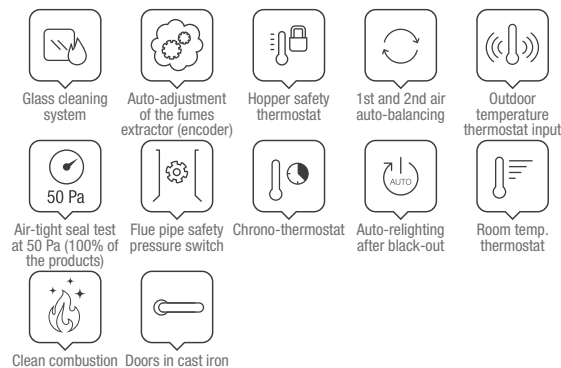

## COLOUR CHOICES

External facing in majolica



Bordeaux

White

Bright taupe

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



### AIR-TIGHT

**SAFE:** Air-tight combustion chamber and tank: **technology** and innovation at the service of your safety



### THE LATEST GENERATION IGNITION SYSTEM

**FAST:** For immediate warmth in your home, always and everywhere



### EXCLUDABLE FORCED VENTILATION

**SILENT:** silence, without sacrificing efficiency



### HOME CONTROL SOLUTION

**INNOVATIVE:** Always in contact with your stove, even when you are away from home



### SELF-CLEANING BRAZIER

**CONVENIENT:** your stove cleans itself

Freedom of choice  
and cutting-edge  
technology are merged in  
Margaret, the combined  
wood/pellet stove that  
redefines the way of  
heating:  
customised combustion  
and smart regulation  
of each detail.



Evolution  
*line*

H  
Y  
B  
R  
I  
D  
E  
  
S  
T  
O  
V  
E  
S





# MARGARET


**E** Combined pellet/wood stove

Evolution  
*Life*

New 2024

**A+** | 10,0\*\* kW-N | 287\*\* m<sup>3</sup>

## CHARACTERISTICS

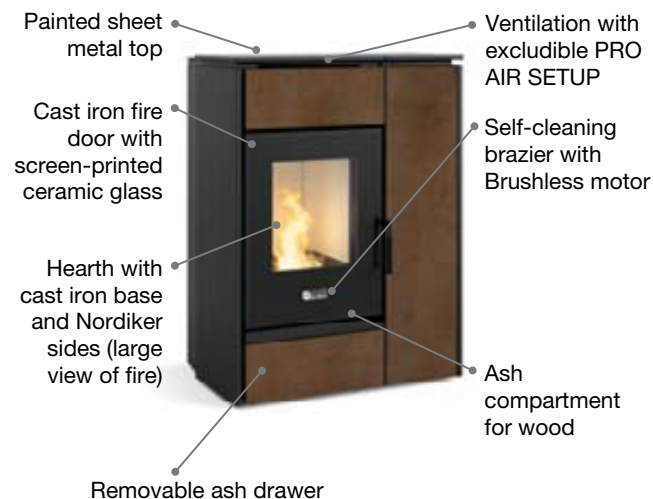

- Airtight stove
- FPC Plus function
- 'Total Control 3.0' app with Alexa and remote assistance functions
- Easy Setup
- Easy Control
- Weekly chrono-thermostat
- Primary/secondary air management via motor-controlled valve with automatic return (in the event of power failure)
- Brushless pellet loading motor
- Pellet level sensor
- Combustion chamber probe
- Ceramics glow plug
- Micro control on door
- Control pressure switches
- AIR ZONE CONTROL with excludable ducting (if optionally purchased)

## ECODESIGN\*\*



Download  
Technical Sheet



SCAN ME

## TECHNICAL DATA

### Nominal power (min-max)

4,1 - 10,0 kW-N \*\*

### Efficiency (min-max)

> 88,0 % \*\*

### Hourly consumption (min-max)

0,9 - 2,4 kg/h \*\* (pellet)  
2,4 kg/h \*\* (wood)

### Dimensions (WxHxD)

890 x 1157 x 625 mm \*\*

### Net weight

\*\* kg

### Smoke outlet diameter (Ø)

120 mm B/T \*\*

### Tank total capacity

~30 kg / ~48 ℓ\*\*

### Electric consumption (min-max)

\*\* W

### Wood length (max)

33 cm \*\*

## TECHNOLOGY



Glass cleaning system



Auto-adjustment of the fumes extractor (encoder)



1st and 2nd air auto-balancing



Outdoor temperature thermostat input



Air-tight seal test at 50 Pa (100% of the products)



Flue pipe safety pressure switch



Chrono-thermostat



Auto-relighting after black-out



Room temp. thermostat



Clean combustion



Doors in cast iron

## COLOUR CHOICES

Painted steel and Stoneware or Natural Stone cladding



Gres Corten



Gres Ostuni



Natural stone (PT)

## STANDARD EQUIPMENT



### REMOTE CONTROL


Backlit IR touch remote control



### DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 3.0")

## OPTIONAL



### MARGARET DUCT KIT



### THE LATEST GENERATION IGNITION SYSTEM

**FAST:** For immediate warmth in your home, always and everywhere



### EXCLUDABLE FORCED VENTILATION

**SILENT:** silence, without sacrificing efficiency



### PWM PUMP AUTOMATICALLY CONTROLLED BY THE ELECTRONIC BOARD

**SIMPLE:** Relax, the performance of your system is self-adjusting



### NEW ELECTRONICS FOR CONNECTING TO THE SYSTEM EXPANSION CARD

**FLEXIBLE:** Maximum flexibility in the management of comfort in the rooms



### HOME CONTROL SOLUTION

**INNOVATIVE:** Always in contact with your stove, even when you are away from home



### SELF-CLEANING BRAZIER

**CONVENIENT:** your stove cleans itself



### OPTIMISED COMBUSTION


**EFFICIENT:** Reduces the waiting time for relighting, ensuring optimal combustion

Silent and powerful,  
they distribute the heat  
rapidly and uniformly  
throughout the home.



Evolution  
*line*

P  
E  
L  
L  
E  
T  
H  
E  
A  
T  
I  
G  
N  
I  
T  
I  
O  
N  
S  
T  
O  
V  
E  
S

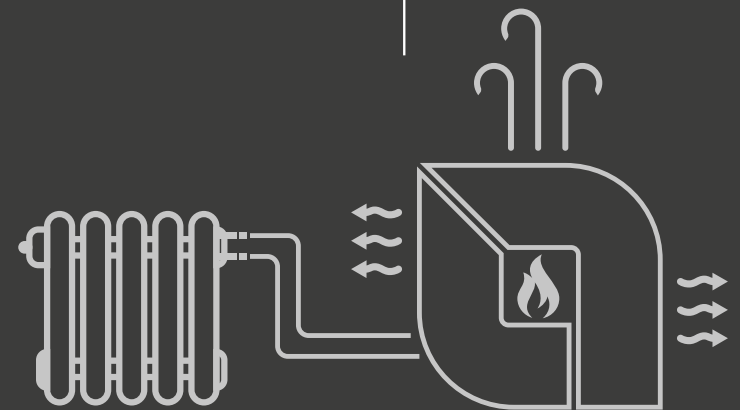

**A+** | 16,2 kW-N | 14,0 kW-H<sub>2</sub>O | 465 m<sup>3</sup>

## CHARACTERISTICS



- Air relief valve
- Output smoke outlet possibilities: rear
- Wide fire vision
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer

## ECODESIGN



Download  
Technical Sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min-max)**  
4,6 - 16,2 kW-N

**Power given back to water (min-max)**  
3,6 - 14,0 kW-H<sub>2</sub>O

**Efficiency (min-max)**  
90,6 - 90,9 %

**Hourly consumption (min-max)**  
1,1 - 3,7 kg/h

**Dimensions (WxHxD)**  
576 x 1157 x 621 mm

**Net weight**  
210 kg


**Smoke outlet diameter (Ø)**  
100 mm B

**Tank total capacity**  
~30 kg / ~48 l

**Electric consumption (min-max)**  
20 - 40 W

**Working pressure (bar)**  
3 bar

## TECHNOLOGY

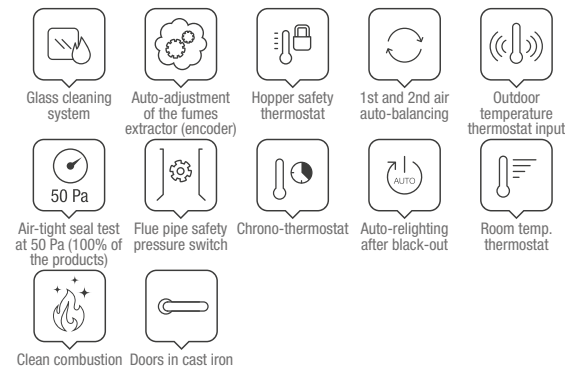

## COLOUR CHOICES

High temperature painted steel covering



## STANDARD EQUIPMENT



**REMOTE CONTROL**  
Backlit IR touch remote control



**BLACK LCD**




# EVELYNE IDRO 2.0

**E** Airtight, ventilated, slim pellet thermo-stove

Evolution  
*Life*

**A+** | 18,0 kW-N | 14,8 kW-H<sub>2</sub>O | 517 m<sup>3</sup>

## CHARACTERISTICS

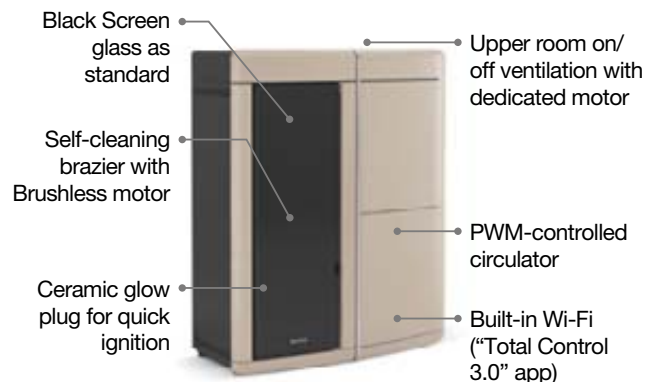

Rear hydraulic connections, accessible from the right side.

- Vent
- Smoke discharge outlet option: rear, upper, right-hand side
- Reduced depth
- Pressure transducer with display
- Thick steel combustion chamber
- Cast iron door and brazier
- Combustion chamber probe
- Double door: outer door with flat tempered glass
- Side shell and tube heat exchanger (manual cleaning)
- Emergency module
- Thermal and water pressure relief valves
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer

## ECODESIGN



Download technical data sheet



SCAN ME

## TECHNICAL DATA

Nominal power (min. - max.)

5,3 - 18,0 kW-N

Water heating power (min. - max.)

3,5 - 14,8 kW-H<sub>2</sub>O

Efficiency (min. - max.)

95,9 - 93,5 %

Hourly consumption (min. - max.)

1,1 - 4,0 kg/h

Dimensions (WxHxD)

878 x 1098 x 412 mm

Net weight

209 kg

Smoke outlet diameter (Ø)

100 mm B/T/RH side

Tank total capacity

~27 kg / ~43 l

Electric consumption (min. - max.)

80 - 85 W

Working pressure (bar)

3 bar

## TECHNOLOGY



Glass cleaning system



Self-adjusting smoke extractor (encoder)



Tank safety thermostat



Primary and secondary air self-balancing



External ambient thermostat connection



Airtightness test at 50 pa (100% products)



Flue safety pressure switch



Programmable thermostat



Automatic reignition after blackout



Ambient temperature thermostat



Clean combustion



Cast iron doors

## FINISHES

Majolica cladding



Grey



White



Taupe

## STANDARD EQUIPMENT



### RADIO REMOTE CONTROL

Radio remote control with "handheld device", with thermostat function



### CONSOLE WITH BUILT-IN WI-FI

("Total Control 3.0" app)




# ISIDORA IDRO H16

Ventilated pellet thermo-stove

Evolution  
*Life*

**A+** | 18,7 kW-N | 16,0 kW-H<sub>2</sub>O | 536 m<sup>3</sup>

## CHARACTERISTICS

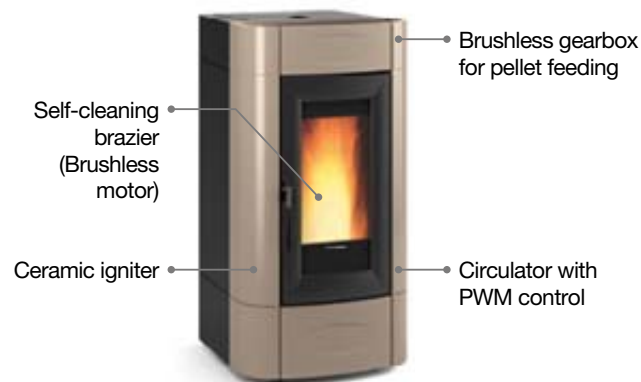

- Air relief valve
- Upper room ventilation with dedicated motor, excludable
- Output smoke outlet possibilities: rear aligned
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Hermetic tank
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Wide fire vision
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer

## ECODESIGN



Download  
Technical Sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min-max)**  
5,6 - 18,7 kW-N

**Power given back to water (min-max)**  
4,3 - 16,0 kW-H<sub>2</sub>O

**Efficiency (min-max)**  
91,5 - 92,4 %

**Hourly consumption (min-max)**  
1,3 - 4,2 kg/h

**Dimensions (WxHxD)**  
596 x 1165 x 708 mm

**Net weight**  
227 kg


**Smoke outlet diameter (Ø)**  
100 mm B

**Tank total capacity**  
~33 kg / ~53 ℓ

**Electric consumption (min-max)**  
60 - 85 W

**Working pressure (bar)**  
3 bar

## TECHNOLOGY

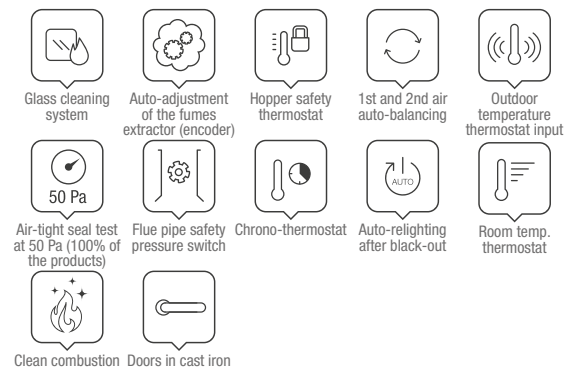

## COLOUR CHOICES

Finish in majolica and painted sheet metal



Bordeaux

White

Bright taupe

## STANDARD EQUIPMENT



### REMOTE CONTROL

Backlit IR touch remote control



### DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")

# ISIDORA IDRO H2O

Ventilated pellet thermo-stove

Evolution  
*Life*

**A++** | 23,2 kW-N | 20,0 kW-H<sub>2</sub>O | 665 m<sup>3</sup>

## CHARACTERISTICS



- Air relief valve
- Upper room ventilation with dedicated motor, excludable
- Output smoke outlet possibilities: rear aligned
- Pressure transducer and display pressure value indication
- Combustion chamber in thick steel
- Ergonomic handle
- Door fire and brazier in cast iron
- Hermetic tank
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Thermal and pressure safety
- Wide fire vision
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer

## ECODESIGN



Download  
Technical Sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min-max)**  
6,9 - 23,2 kW-N

**Power given back to water (min-max)**  
5,5 - 20,0 kW-H<sub>2</sub>O

**Efficiency (min-max)**  
91,2 - 91,5 %

**Hourly consumption (min-max)**  
1,6 - 5,3 kg/h

**Dimensions (WxHxD)**  
596 x 1243 x 708 mm

**Net weight**  
235 kg


**Smoke outlet diameter (Ø)**  
100 mm B

**Tank total capacity**  
~38 kg / ~61 ℓ

**Electric consumption (min-max)**  
65 - 85 W

**Working pressure (bar)**  
3 bar

## TECHNOLOGY

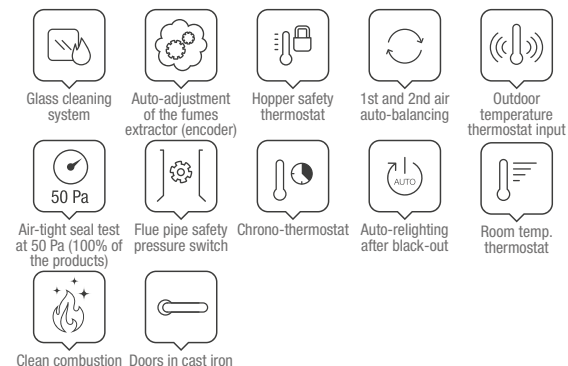

## COLOUR CHOICES

Finish in majolica and painted sheet metal



Ivory

Bordeaux

## STANDARD EQUIPMENT



### REMOTE CONTROL

Backlit IR touch remote control



### DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")

# ISIDORA IDRO H23 5.0

Ventilated pellet thermo-stove

Evolution  
*Life*

**A+** | 27,6 kW-N | 23,0 kW-H<sub>2</sub>O | 792 m<sup>3</sup>

## CHARACTERISTICS



- Air relief valve
- Upper room ventilation with dedicated motor, excludable
- Output smoke outlet possibilities: rear aligned
- Combustion chamber in thick steel
- Fire door and brazier in cast iron
- Hermetic tank
- Combustion chamber probe
- Shell and tube exchanger (manual cleaning)
- Expansion tank
- Safety valve 3 bar
- Extractable ash drawer
- FPC – An innovative adaptive system for regulating and maintaining air combustion constant over time
- FPC PLUS – besides the work carried out by FPC, it allows abnormal situations to be noted by setting the generator in safe conditions.

## ECODESIGN



Download  
Technical Sheet



SCAN ME

## TECHNICAL DATA

**Nominal power (min-max)**  
7,7 - 27,6 kW-N

**Power given back to water (min-max)**  
6,1 - 23,0 kW-H<sub>2</sub>O

**Efficiency (min-max)**  
89,3 - 92,1%

**Hourly consumption (min-max)**  
1,7 - 6,1 kg/h

**Dimensions (WxHxD)**  
596 x 1243 x 737 mm

**Net weight**  
235 kg


**Smoke outlet diameter (Ø)**  
100 mm B

**Tank total capacity**  
~38 kg / ~61 ℓ

**Electric consumption (min-max)**  
30 - 38 W

**Working pressure (bar)**  
3 bar

## TECHNOLOGY

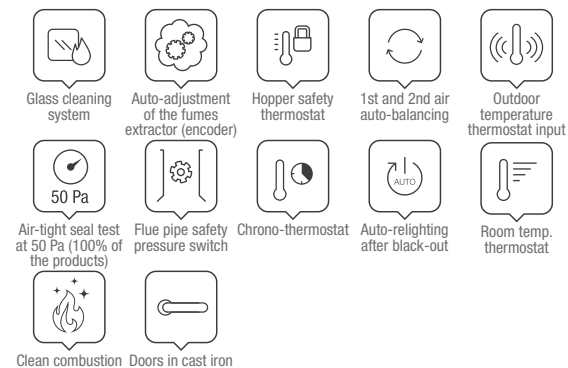

## COLOUR CHOICES

Finish in majolica and painted sheet metal



White

Bordeaux

## STANDARD EQUIPMENT



### REMOTE CONTROL

Backlit IR touch remote control



### DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 3.0")

# TELEPELLET BOILERS

Evolution  
*Life*

Saving, comfort  
and technology



» **THE LATEST GENERATION IGNITION SYSTEM**  
**FAST:** For immediate warmth in your home, always and everywhere

⚙️ **PWM PUMP AUTOMATICALLY MANAGED BY THE ELECTRONIC CARD**  
**SIMPLE:** Relax, the performance of your system is self-adjusting

⚡ **NEW ELECTRONICS FOR CONNECTION TO THE PLANT'S EXPANSION CARD**  
**FLEXIBLE:** Maximum flexibility in the management of comfort in the rooms

📱 **HOME CONTROL SOLUTION**  
**INNOVATIVE:** Always in contact with your stove, even when you are away from home

🔔 **SELF-CLEANING BRAZIER**  
**CONVENIENT:** your stove cleans itself

🔥 **OPTIMISED COMBUSTION**  
**EFFICIENT:** Reduces the waiting time for relighting, ensuring optimal combustion




# PR20

Pellet boiler with ash extractor

Evolution  
*Life*

**A+** | 20,0 kW-N | 20,0 kW-H<sub>2</sub>O | 573 m<sup>3</sup>

## CHARACTERISTICS

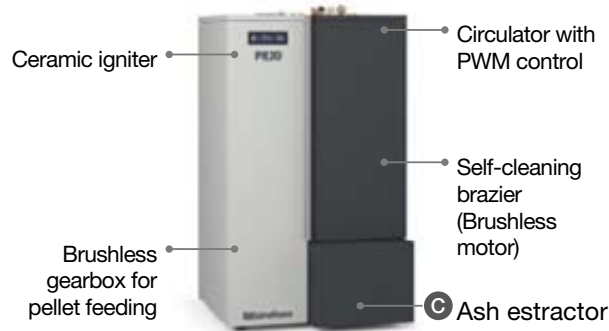

- A** Hydraulic connections at the top
- B** Output smoke outlet possibilities: rear, left lateral
  - Air relief valve
  - Minimum pellet tank level probe
  - Combustion chamber in thick steel
  - Combustion chamber probe
  - Door fire and brazier in cast iron
  - Thermal and pressure safety
  - Shell and tube exchanger (automatic cleaning)
  - Front pellet tank feeding
  - Expansion tank
  - Wheels to facilitate movement
  - Safety valve 3 bar
  - **Innovative adaptive system to adjust and even the combustion air inlet**
- C** Ash extractor



## TECHNICAL DATA

**Nominal power (min-max)**  
5,7 - 20,0 kW-N

**Power given back to water (min-max)**  
5,7 - 20,0 kW-H<sub>2</sub>O

**Efficiency (min-max)**  
88,4 - 92,4 %

**Hourly consumption (min-max)**  
1,4 - 4,6 kg/h

**Dimensions (WxHxD)**  
822 x 1398 x 817 mm

**Net weight**  
310 kg


**Smoke outlet diameter (Ø)**  
100 mm B/LH side

**Tank total capacity**  
~75 kg / ~119 ℓ

**Electric consumption (min-max)**  
60 - 65 W

**Working pressure (bar)**  
3 bar

## TECHNOLOGY

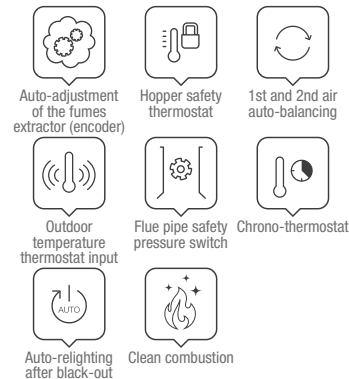

## ECODESIGN



Download  
Technical Sheet



SCAN ME

## COLOUR CHOICES

High temperature painted steel covering



Light grey / Dark grey

## STANDARD EQUIPMENT



### DISPLAY BLACK MASK

Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")



### PLANT EXPANSION CARD KIT

## OPTIONAL

Automatic loading pellet stocking tank

Automatic pellet loading kit 330 ℓ

Automatic pellet loading kit 660 ℓ

Extension module 180 ℓ (Available for: Automatic pellet loading kit 660 ℓ)


Extension module 270 ℓ (Available for: Automatic pellet loading kit 660 ℓ)

# PR30

Pellet boiler with ash extractor

**A+** | 30,0 kW-N | 30,0 kW-H<sub>2</sub>O | 860 m<sup>3</sup>

## CHARACTERISTICS

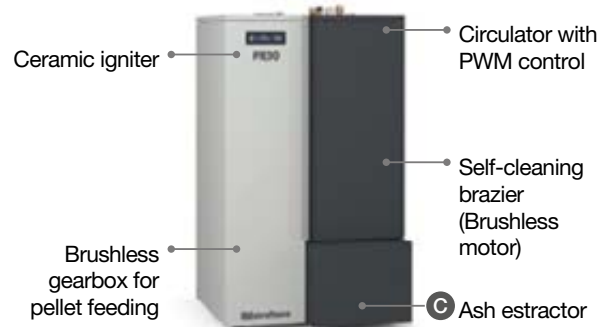


- A** Hydraulic connections at the top
- B** Output smoke outlet possibilities: rear, left lateral
  - Air relief valve
  - Minimum pellet tank level probe
  - Combustion chamber in thick steel
  - Combustion chamber probe
  - Door fire and brazier in cast iron
  - Thermal and pressure safety
  - Shell and tube exchanger (automatic cleaning)
  - Front pellet tank feeding
  - Expansion tank
  - Wheels to facilitate movement
  - Safety valve 3 bar
  - **Innovative adaptive system to adjust and even the combustion air inlet**



## TECHNICAL DATA

<b>Nominal power (min-max)</b> 8,9 - 30,0 kW-N	<b>Smoke outlet diameter (Ø)</b> 120 mm B/LH side
<b>Power given back to water (min-max)</b> 8,9 - 30,0 kW-H <sub>2</sub> O	<b>Tank total capacity</b> ~75 kg / ~119 ℓ
<b>Efficiency (min-max)</b> 92,7 - 92,4 %	<b>Electric consumption (min-max)</b> 70 - 85 W
<b>Hourly consumption (min-max)</b> 2,0 - 6,8 kg/h	<b>Working pressure (bar)</b> 3 bar
<b>Dimensions (WxHxD)</b> 892 x 1398 x 817 mm	
<b>Net weight</b> 325 kg	

## TECHNOLOGY

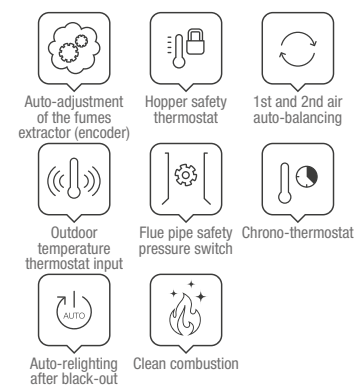

## ECODESIGN



Download  
Technical Sheet

SCAN ME

## COLOUR CHOICES

High temperature painted steel covering



Light grey / Dark grey

## STANDARD EQUIPMENT

- DISPLAY BLACK MASK**  
Display Black Mask with integrated Wi-Fi (App "Total Control 2.0")
- PLANT EXPANSION CARD KIT**

## OPTIONAL

- Automatic loading pellet stocking tank
- Automatic pellet loading kit 330 ℓ
- Automatic pellet loading kit 660 ℓ
- Extension module 180 ℓ (Available for: Automatic pellet loading kit 660 ℓ)
- Extension module 270 ℓ (Available for: Automatic pellet loading kit 660 ℓ)



# Control Solution

Tecnologia, Comfort e Risparmio

Discover the innovative solutions to manage the comfort of your home at best and in utter convenience thanks to your pellet product.

## ACCESSORY



### THE INSTALLATION EXPANSION BOARD

Optimises functioning of the appliance by means of appropriate configurations, reducing consumption and extending the working life of the product.

Thermal energy storage tanks

Wood or pellet boilers

Pellet stocking tank



**ALWAYS IN CONTACT WITH YOUR STOVE**



### ACCESSORY APP

#### WIFI MODULE GREY LABEL

Compatible with models introduced from 2022



Total Control 3.0



### ACCESSORY APP

#### WIFI MODULE BLACK LABEL

Compatible with models introduced from 2018



Total Control 2.0



### ACCESSORY APP

#### WIFI MODULE WHITE LABEL

Compatible with models introduced up to 2017



Total Control



### Display Black Mask


Nuovo display Black Mask con Wi-Fi integrato per gestione da remoto con la nuova App dedicata "Total Control 2.0"



Total Control 2.0

WOOD

STOVES

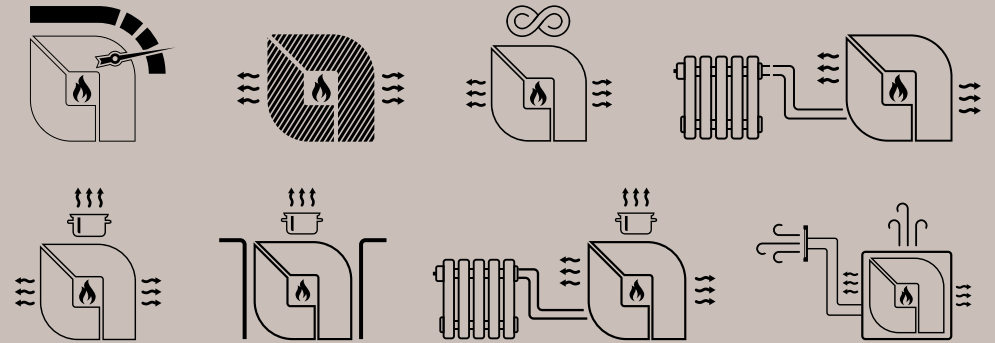

The quality and solidity of the materials,  
the harmony of the lines,  
the care in the realisation  
and the safety in use.

With this in mind,  
“La Nordica-Extraflame”  
wood-burning products are born.



# HIGH PERFORMANCE WOOD-BURNING STOVES



HIGH YIELDS AND LOW EMISSIONS  
FOR AN UNMISTAKABLE STYLE



## EMILIANA

A+



Bordeaux

<b>kW-N</b>	6,5
<b>%</b>	88,7
<b>m<sup>3</sup></b>	186
<b>kg/h</b>	1,7
<b>Dim. WxHxD</b>	453x950x490
<b>kg</b>	140
<b>Ø mm</b>	120 T



White Infinity



## EMILIANA - STEEL

A+



Anthracite Black

<b>kW-N</b>	6,5
<b>%</b>	88,7
<b>m<sup>3</sup></b>	186
<b>kg/h</b>	1,7
<b>Dim. WxHxD</b>	453x950x490
<b>kg</b>	121
<b>Ø mm</b>	120 T



## FEDORA

A+



White Infinity

<b>kW-N</b>	8,3
<b>%</b>	86,4
<b>m<sup>3</sup></b>	238
<b>kg/h</b>	2,3
<b>Dim. WxHxD</b>	559x1035x547
<b>kg</b>	175
<b>Ø mm</b>	130 T



Bordeaux



# HIGH PERFORMANCE WOOD-BURNING STOVES



## FEDORA - STEEL

A+



Anthracite Black

<b>kW-N</b>	8,3
<b>%</b>	86,4
<b>m<sup>3</sup></b>	238
<b>kg/h</b>	2,3
<b>Dim. WxHxD</b>	559x1035x547
<b>kg</b>	150
<b>Ø mm</b>	130 T




## CONCITA 2.0

A+



White Infinity

<b>kW-N</b>	11,8
<b>%</b>	86,4
<b>m<sup>3</sup></b>	338
<b>kg/h</b>	3,2
<b>Dim. WxHxD</b>	559x1545x569
<b>kg</b>	185
<b>Ø mm</b>	150 T

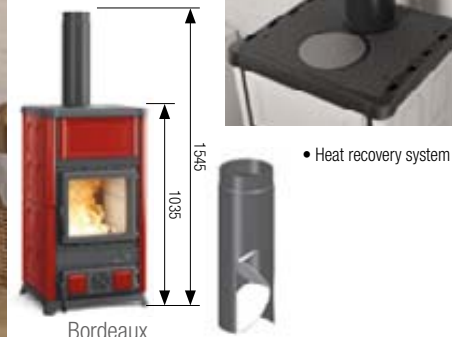

## CONCITA 2.0 - STEEL

A+



Anthracite Black

<b>kW-N</b>	11,8
<b>%</b>	86,4
<b>m<sup>3</sup></b>	338
<b>kg/h</b>	3,2
<b>Dim. WxHxD</b>	559x1545x569
<b>kg</b>	157
<b>Ø mm</b>	150 T



# CAST IRON WOOD-BURNING STOVES



HIGH PERFORMANCE FOR A TIMELESS STYLE



**N.B.** Enameled cast iron, when used correctly, has almost an unlimited life and requires minimal maintenance.

## BRIGITTA GB

A+



<b>kW-N</b>	4,7
<b>%</b>	81,0
<b>m<sup>3</sup></b>	134
<b>kg/h</b>	1,4
<b>Dim. WxHxD</b>	404x640x397
<b>kg</b>	70
<b>Ø mm</b>	120 T



## CANDY 4.0

A+



<b>kW-N</b>	6,2
<b>%</b>	85,1
<b>m<sup>3</sup></b>	177
<b>kg/h</b>	1,7
<b>Dim. WxHxD</b>	404x890x397
<b>kg</b>	85
<b>Ø mm</b>	120 T



## GIULIETTA X 4.0

A+



<b>kW-N</b>	6,5
<b>%</b>	81,7
<b>m<sup>3</sup></b>	186
<b>kg/h</b>	1,9
<b>Dim. WxHxD</b>	487x706x430
<b>kg</b>	115
<b>Ø mm</b>	120 B/T





# CAST IRON WOOD-BURNING STOVES



## ISETTA CON CERCHI EVO 4.0

A+



<b>kW-N</b>	7,3
<b>%</b>	83,6
<b>m<sup>3</sup></b>	209
<b>kg/h</b>	2,0
<b>Dim. WxHxD</b>	660x760x590
<b>kg</b>	167
<b>Ø mm</b>	150 B/T




## ISETTA EVO 4.0

A+



<b>kW-N</b>	7,3
<b>%</b>	83,6
<b>m<sup>3</sup></b>	209
<b>kg/h</b>	2,0
<b>Dim. WxHxD</b>	660x706x590
<b>kg</b>	160
<b>Ø mm</b>	150 B/T



## MARLENA

A+



<b>kW-N</b>	7,5
<b>%</b>	86,5
<b>m<sup>3</sup></b>	215
<b>kg/h</b>	2,0
<b>Dim. WxHxD</b>	465x1060x475
<b>kg</b>	140
<b>Ø mm</b>	130 T

## JENNIFER 2.0

A+



<b>kW-N</b>	7,7
<b>%</b>	81,8
<b>m<sup>3</sup></b>	220
<b>kg/h</b>	2,2
<b>Dim. WxHxD</b>	702x870x478
<b>kg</b>	141
<b>Ø mm</b>	150 T





# CAST IRON WOOD-BURNING STOVES



## ISOTTA FORNO EVO

A+



<b>kW-N</b>	9,7
<b>%</b>	87,7
<b>m<sup>3</sup></b>	278
<b>kg/h</b>	2,6
<b>Dim. WxHxD</b>	795x1244x530
<b>kg</b>	300
<b>Ø mm</b>	150 T
<b>Oven capacity</b>	39 ℓ



## ISOTTA CON CERCHIEVO

A+



<b>kW-N</b>	11,9
<b>%</b>	82,0
<b>m<sup>3</sup></b>	338
<b>kg/h</b>	3,2
<b>Dim. WxHxD</b>	790x830x660
<b>kg</b>	216
<b>Ø mm</b>	150 B/T




## ISOTTA EVO

A+




<b>kW-N</b>	11,9
<b>%</b>	82,0
<b>m<sup>3</sup></b>	338
<b>kg/h</b>	3,2
<b>Dim. WxHxD</b>	790x775x660
<b>kg</b>	205
<b>Ø mm</b>	150 B/T

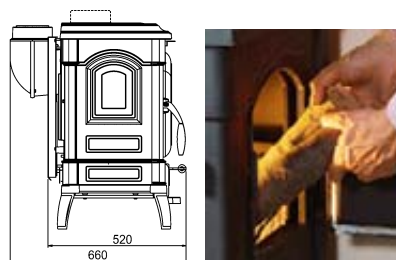

# EVERGREEN WOOD-BURNING STOVE



50 YEARS OF HISTORY, AN UNMISTAKEABLE STYLE

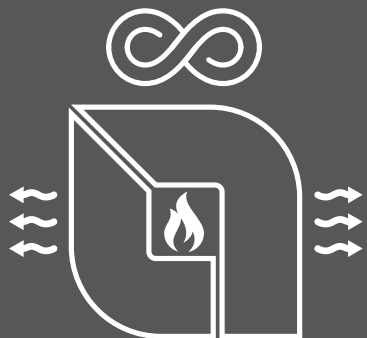

## SUPER JUNIOR

A



<b>kW-N</b>	5,0
<b>%</b>	80,0
<b>m<sup>3</sup></b>	143
<b>kg/h</b>	1,5
<b>Dim. WxHxD</b>	360x771x419
<b>kg</b>	64
<b>Ø mm</b>	120 mm T



Black

Green

## TEA

A+



<b>kW-N</b>	6,6
<b>%</b>	82,0
<b>m<sup>3</sup></b>	189
<b>kg/h</b>	1,8
<b>Dim. WxHxD</b>	414x832x419
<b>kg</b>	77
<b>Ø mm</b>	120 T



White

Anthracite Black

## ASIA BII

A+



<b>kW-N</b>	6,0
<b>%</b>	81,3 %
<b>m<sup>3</sup></b>	172
<b>kg/h</b>	1,7
<b>Dim. WxHxD</b>	438x930x470
<b>kg</b>	159
<b>Ø mm</b>	120 T



Vulcan

# EVERGREEN WOOD-BURNING STOVE



## GEMMA

A+



<b>kW-N</b>	6,0
<b>%</b>	82,2
<b>m<sup>3</sup></b>	172
<b>kg/h</b>	1,7
<b>Dim. WxHxD</b>	460x840x495
<b>kg</b>	85 - PT 98
<b>Ø mm</b>	120 T



Liberty  
Bordeaux

Liberty  
Panna

Natural  
Stone (PT)

## GEMMA FORNO 5.0

A+



<b>kW-N</b>	7,3
<b>%</b>	87,2
<b>m<sup>3</sup></b>	209
<b>kg/h</b>	1,9
<b>Dim. WxHxD</b>	460x1207x495
<b>kg</b>	125 - PT 140
<b>Ø mm</b>	120 T
<b>Oven capacity</b>	19 ℓ



Elegance Bordeaux

Natural Stone (PT)

## ESTER BII

A



<b>kW-N</b>	7,5
<b>%</b>	80,0
<b>m<sup>3</sup></b>	215
<b>kg/h</b>	2,2
<b>Dim. WxHxD</b>	540x950x478
<b>kg</b>	243
<b>Ø mm</b>	130 T



Vulcan

## ESTER FORNO EVO

A+



<b>kW-N</b>	8,2
<b>%</b>	86,7
<b>m<sup>3</sup></b>	235
<b>kg/h</b>	2,2
<b>Dim. WxHxD</b>	540x1300x478
<b>kg</b>	317
<b>Ø mm</b>	130
<b>Oven capacity</b>	22 ℓ



Vulcan



# EVERGREEN WOOD-BURNING STOVE



## ROSSELLA R1 BII

A



<b>kW-N</b>	8,8
<b>%</b>	80,0
<b>m³</b>	252
<b>kg/h</b>	2,4
<b>Dim. WxHxD</b>	578x915x586
<b>kg</b>	155 - 170 PT
<b>Ø mm</b>	130 T



Liberty  
Bordeaux

Liberty  
White Infinity

Liberty  
Panna

## ROSSELLA PLUS FORNO EVO

A+



<b>kW-N</b>	9,1
<b>%</b>	86,0
<b>m³</b>	260
<b>kg/h</b>	2,4
<b>Dim. WxHxD</b>	559x1359x536
<b>kg</b>	195 - 219 PT
<b>Ø mm</b>	130 T
<b>Oven capacity</b>	37 ℓ




Liberty Bordeaux

Natural Stone (PT)






# WOOD-BURNING HEATING STOVES



IT'S TIME TO THINK ABOUT YOUR HEATING PLANT

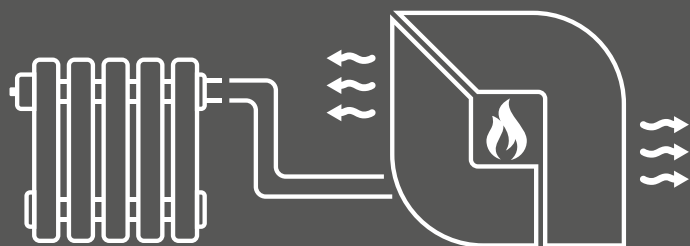

## TERMOROSSELLA PLUS EVO DSA 4.0

A+



Liberty Panna

<b>kW-N</b>	11,1
<b>kW-H<sub>2</sub>O</b>	8,0
<b>%</b>	88,0
<b>m<sup>3</sup></b>	318
<b>kg/h</b>	3,0
<b>Dim. WxHxD</b>	559x915x533
<b>kg</b>	162 - 175 PT
<b>Ø mm</b>	130 T



Liberty Bordeaux Natural Stone (PT)

## TERMOROSSELLA PLUS FORNO DSA 4.0

A+



Liberty Bordeaux

<b>kW-N</b>	11,1
<b>kW-H<sub>2</sub>O</b>	8,0
<b>%</b>	88,0
<b>m<sup>3</sup></b>	318
<b>kg/h</b>	3,0
<b>Dim. WxHxD</b>	559x1359x533
<b>kg</b>	218 - 242 PT
<b>Ø mm</b>	130 T
<b>Oven capacity</b>	37 ℓ



Liberty Panna Natural Stone (PT)

## TERMOISOTTA DSA


★★★★ A



<b>kW-N</b>	15,0
<b>kW-H<sub>2</sub>O</b>	8,5
<b>%</b>	78,4
<b>m<sup>3</sup></b>	430
<b>kg/h</b>	4,4
<b>Dim. WxHxD</b>	760x775x520
<b>kg</b>	212
<b>Ø mm</b>	150 T



# WOOD-BURNING HEATING STOVES



## LORIET S DSA

A+



Bordeaux

<b>kW-N</b>	16,8
<b>kW-H<sub>2</sub>O</b>	10,5
<b>%</b>	88,0
<b>m<sup>3</sup></b>	481
<b>kg/h</b>	4,3
<b>Dim. WxHxD</b>	570x1258x567
<b>kg</b>	203
<b>Ø mm</b>	130 T



White Infinity

## NORMA SIDRO DSA

A



Bordeaux


<b>kW-N</b>	19,5
<b>kW-H<sub>2</sub>O</b>	14,9
<b>%</b>	78,6
<b>m<sup>3</sup></b>	559
<b>kg/h</b>	5,8
<b>Dim. WxHxD</b>	720x1242x575
<b>kg</b>	249
<b>Ø mm</b>	160 T




Agate Grey



# EVERGREEN WOOD-BURNING COOKER



FOOD COOKED IN A WOOD-BURNING STOVE  
JUST TASTES BETTER

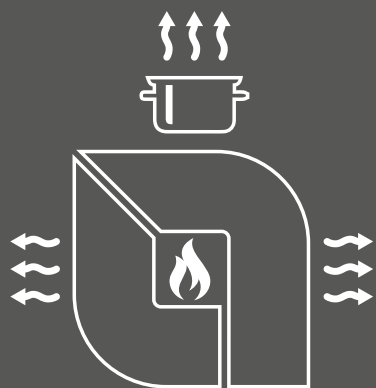

## FAMILY 4,5

A+



Anthracite Black

<b>kW-N</b>	7,5
<b>%</b>	81,0
<b>m<sup>3</sup></b>	215
<b>kg/h</b>	2,2
<b>Dim. WxHxD</b>	964x853x642
<b>kg</b>	125
<b>Ø mm</b>	130 T
<b>Oven capacity</b>	41 ℓ



White

Cappuccino

## SOVRANA EASYEVO 2.0

A+



Anthracite Black

<b>kW-N</b>	7,5
<b>%</b>	81,0
<b>m<sup>3</sup></b>	215
<b>kg/h</b>	2,2
<b>Dim. WxHxD</b>	964x848x641
<b>kg</b>	140
<b>Ø mm</b>	130 B/T
<b>Oven capacity</b>	41 ℓ



White

Cappuccino

## ROSETTA 5.0 - CERAMICA

A+



Liberty Panna

<b>kW-N</b>	7,9
<b>%</b>	86,9
<b>m<sup>3</sup></b>	226
<b>kg/h</b>	2,1
<b>Dim. WxHxD</b>	885x843x572
<b>kg</b>	153
<b>Ø mm</b>	130 B/T
<b>Oven capacity</b>	28 ℓ



Liberty Bordeaux

# EVERGREEN WOOD-BURNING COOKER



## ROSETTA 5.0 - PETRA

A+



<b>kW-N</b>	7,9
<b>%</b>	86,9
<b>m<sup>3</sup></b>	226
<b>kg/h</b>	2,1
<b>Dim. WxHxD</b>	885x843x572
<b>kg</b>	167
<b>Ø mm</b>	130 B/T
<b>Oven capacity</b>	28 ℓ

Natural Stone

## ROSETTA 5.0 - MAIOLICA

A+



<b>kW-N</b>	7,9
<b>%</b>	86,9
<b>m<sup>3</sup></b>	226
<b>kg/h</b>	2,1
<b>Dim. WxHxD</b>	885x843x572
<b>kg</b>	169
<b>Ø mm</b>	130 B/T
<b>Oven capacity</b>	28 ℓ

Taupe



Bordeaux

## ROSETTA SINISTRA 5.0

A+



<b>kW-N</b>	7,9
<b>%</b>	86,9
<b>m<sup>3</sup></b>	226
<b>kg/h</b>	2,1
<b>Dim. WxHxD</b>	885x843x572
<b>kg</b>	153
<b>Ø mm</b>	130 B/T
<b>Oven capacity</b>	28 ℓ

Liberty Bordeaux



Liberty Panna

## ROSETTA SINISTRA 5.0 - PETRA

A+




<b>kW-N</b>	7,9
<b>%</b>	86,9
<b>m<sup>3</sup></b>	226
<b>kg/h</b>	2,1
<b>Dim. WxHxD</b>	885x843x572
<b>kg</b>	167
<b>Ø mm</b>	130 B/T
<b>Oven capacity</b>	28 ℓ

Natural Stone



# EVERGREEN WOOD-BURNING COOKER



## ROSETTA SINISTRA 5.0 - STEEL

A+



Anthracite Black

<b>kW-N</b>	7,9
<b>%</b>	86,9
<b>m<sup>3</sup></b>	226
<b>kg/h</b>	2,1
<b>Dim. WxHxD</b>	885x843x572
<b>kg</b>	139
<b>Ø mm</b>	130 B/T
<b>Oven capacity</b>	28 ℓ



Dotted White

## ROSA REVERSE 2.0

A+



Liberty Bordeaux

<b>kW-N</b>	8,2
<b>%</b>	86,5
<b>m<sup>3</sup></b>	235
<b>kg/h</b>	2,3
<b>Dim. WxHxD</b>	1030x851x650
<b>kg</b>	183
<b>Ø mm</b>	150 B/T
<b>Oven capacity</b>	28 ℓ



Liberty Panna

## ROSA SINISTRA REVERSE

A+



Liberty Panna

<b>kW-N</b>	8,2
<b>%</b>	86,5
<b>m<sup>3</sup></b>	235
<b>kg/h</b>	2,3
<b>Dim. WxHxD</b>	1030x851x650
<b>kg</b>	183 - 200 PT
<b>Ø mm</b>	150 B/T
<b>Oven capacity</b>	28 ℓ



Liberty Bordeaux



Natural Stone (PT)

## ROSA 5.0 - CERAMICA

A+




Liberty Panna

<b>kW-N</b>	8,8
<b>%</b>	85,4
<b>m<sup>3</sup></b>	252
<b>kg/h</b>	2,5
<b>Dim. WxHxD</b>	1030x851x650
<b>kg</b>	183
<b>Ø mm</b>	150 B/T
<b>Oven capacity</b>	41 ℓ



Liberty Bordeaux

# EVERGREEN WOOD-BURNING COOKER



## ROSA 5.0 - MAIOLICA

A+



Bordeaux

<b>kW-N</b>	8,8
<b>%</b>	85,4
<b>m<sup>3</sup></b>	252
<b>kg/h</b>	2,5
<b>Dim. WxHxD</b>	1030x851x650
<b>kg</b>	204
<b>Ø mm</b>	150 B/T
<b>Oven capacity</b>	41 ℓ



White Infinity

Taupe

## ROSA 5.0 - PETRA

A+



Natural Stone

<b>kW-N</b>	8,8
<b>%</b>	85,4
<b>m<sup>3</sup></b>	252
<b>kg/h</b>	2,5
<b>Dim. WxHxD</b>	1030x851x650
<b>kg</b>	200 PT
<b>Ø mm</b>	150 B/T
<b>Oven capacity</b>	41 ℓ

## ROSA 5.0 - STEEL

A+



Anthracite Black

<b>kW-N</b>	8,8
<b>%</b>	85,4
<b>m<sup>3</sup></b>	252
<b>kg/h</b>	2,5
<b>Dim. WxHxD</b>	1030x851x650
<b>kg</b>	170
<b>Ø mm</b>	150 B/T
<b>Oven capacity</b>	41 ℓ



Dotted White

## SUPREMA 4.0


A+



Glazed Black

<b>kW-N</b>	9,0
<b>%</b>	87,7
<b>m<sup>3</sup></b>	258
<b>kg/h</b>	2,4
<b>Dim. WxHxD</b>	974x860x660
<b>kg</b>	220
<b>Ø mm</b>	150 B/T
<b>Oven capacity</b>	78 ℓ

# EVERGREEN WOOD-BURNING COOKER



## ROSA L 5.0 - STEEL

**A+**



<b>kW-N</b>	9,5
<b>%</b>	86,7
<b>m<sup>3</sup></b>	272
<b>kg/h</b>	2,5
<b>Dim. WxHxD</b>	975x861x670
<b>kg</b>	192
<b>Ø mm</b>	150 B/T
<b>Oven capacity</b>	55 ℓ

## ROSA XXL 5.0 - STEEL

**A+**



<b>kW-N</b>	11,0
<b>%</b>	87,3
<b>m<sup>3</sup></b>	315
<b>kg/h</b>	2,9
<b>Dim. WxHxD</b>	1074x861x669
<b>kg</b>	202
<b>Ø mm</b>	150 B/T
<b>Oven capacity</b>	78 ℓ

## ROSA XXL 5.0 - MAIOLICA

**A+**



<b>kW-N</b>	11,0
<b>%</b>	87,3
<b>m<sup>3</sup></b>	315
<b>kg/h</b>	2,9
<b>Dim. WxHxD</b>	1074x861x669
<b>kg</b>	235
<b>Ø mm</b>	150 B/T
<b>Oven capacity</b>	78 ℓ



Bordeaux

## ROSA XXL 5.0 - PETRA

**A+**



<b>kW-N</b>	11,0
<b>%</b>	87,3
<b>m<sup>3</sup></b>	315
<b>kg/h</b>	2,9
<b>Dim. WxHxD</b>	1074x861x669
<b>kg</b>	275
<b>Ø mm</b>	150 B/T
<b>Oven capacity</b>	78 ℓ

White Infinity

Natural Stone



# WOOD-BURNING COOKERS FOR INSERTION



THE PERFECT COMBINATION FOR YOUR KITCHEN



## VICENZA EVO

A+



Inox

<b>kW-N</b>	6,0
<b>%</b>	86,0
<b>m<sup>3</sup></b>	172
<b>kg/h</b>	1,7
<b>Dim. WxHxD</b>	600x850-910x600
<b>kg</b>	137
<b>Ø mm</b>	120 mm T/B/RH Side/LH Side
<b>Oven capacity</b>	25 ℓ
<b>W</b>	25 W



Anthracite Black

## VERONA XXL

A+



Anthracite Black

<b>kW-N</b>	7,0
<b>%</b>	85,1
<b>m<sup>3</sup></b>	200
<b>kg/h</b>	1,9
<b>Dim. WxHxD</b>	800x850-910x600
<b>kg</b>	175
<b>Ø mm</b>	150 mm T/B/RH Side/LH Side
<b>Oven capacity</b>	68 ℓ
<b>W</b>	25 W



Inox

## VERONA XXL - MAIOLICA (FREE-STANDING)

A+



White Infinity

<b>kW-N</b>	7,0
<b>%</b>	85,1
<b>m<sup>3</sup></b>	200
<b>kg/h</b>	1,9
<b>Dim. WxHxD</b>	800x910x600
<b>kg</b>	200
<b>Ø mm</b>	150 mm B/T
<b>Oven capacity</b>	68 ℓ
<b>W</b>	25 W



Bordeaux



# WOOD-BURNING COOKERS FOR INSERTION



## VERONA XXL - PETRA (FREE-STANDING)

**A+**



<b>kW-N</b>	7,0
<b>%</b>	85,1
<b>m<sup>3</sup></b>	200
<b>kg/h</b>	1,9
<b>Dim. WxHxD</b>	800x910x600
<b>kg</b>	206
<b>Ø mm</b>	150 mm B/T
<b>Oven capacity</b>	68 ℓ
<b>W</b>	25 W

Natural Stone

## VENEZIA

**A+**




<b>kW-N</b>	8,3
<b>%</b>	86,9
<b>m<sup>3</sup></b>	238
<b>kg/h</b>	2,2
<b>Dim. WxHxD</b>	900x850-910x600
<b>kg</b>	175
<b>Ø mm</b>	130 B/T/RH Side
<b>Oven capacity</b>	44 ℓ
<b>W</b>	25 W

Inox




Anthracite Black

# WOOD-BURNING THERMO-COOKERS



HEAT, TASTE AND ATMOSPHERE:  
ALL OF THIS IN ONE PRODUCT

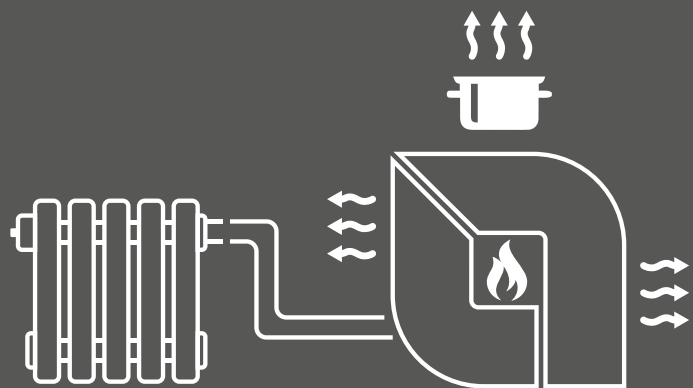

## TERMOSOVRAANA DSA

A+



Anthracite Black

<b>kW-N</b>	13,5
<b>kW-H<sub>2</sub>O</b>	9,0
<b>%</b>	81,2
<b>m<sup>3</sup></b>	387
<b>kg/h</b>	3,9
<b>Dim. WxHxD</b>	964x889x640
<b>kg</b>	166
<b>Ø mm</b>	130 B/T
<b>Oven capacity</b>	41 ℓ



White

## TERMOROSA DSA

A



Liberty Bordeaux

<b>kW-N</b>	15,5
<b>kW-H<sub>2</sub>O</b>	9,0
<b>%</b>	79,9
<b>m<sup>3</sup></b>	444
<b>kg/h</b>	4,5
<b>Dim. WxHxD</b>	1017x852x662
<b>kg</b>	211- 226 PT kg
<b>Ø mm</b>	150 B/T
<b>Oven capacity</b>	41 ℓ



Natural Stone (PT)

## TERMOROSA XXL DSA


A+




Anthracite Black

<b>kW-N</b>	18,4
<b>kW-H<sub>2</sub>O</b>	15,1
<b>%</b>	83
<b>m<sup>3</sup></b>	527
<b>kg/h</b>	5,2
<b>Dim. WxHxD</b>	1074x861x690
<b>kg</b>	275 kg
<b>Ø mm</b>	160 B/T
<b>Oven capacity</b>	55 ℓ

# CAST IRON / CRYSTAL / WIDE INSERTS FOR WOOD-BURNING



## THE IDEAL SOLUTION FOR YOUR FIREPLACE

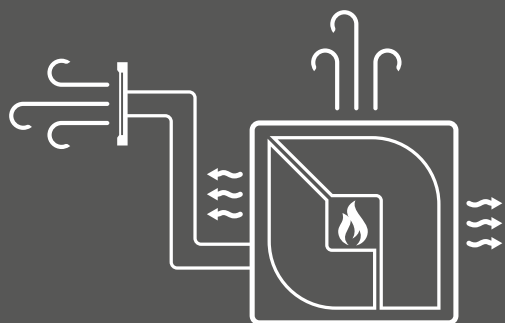


**N.B.:** Two adequately sized ventilation grilles (an inlet grille at the bottom and an outlet one at the top) should be installed during assembly to ensure correct operation and permit heating of the room and correct cooling of the product (see the manual attached to the product).

## INSERTO 60 4.0 - VENTILATO A+




<b>kW-N</b>	6,5
<b>%</b>	80,8
<b>m<sup>3</sup></b>	186
<b>kg/h</b>	1,9
<b>Dim. WxHxD</b>	595x500x440
<b>kg</b>	124
<b>Ø mm</b>	160 T
<b>W</b>	23

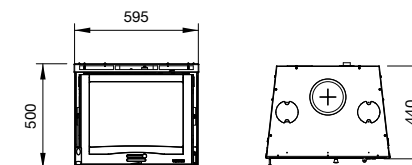

## INSERTO 70 H49 4.0 - VENTILATO A+




<b>kW-N</b>	6,7
<b>%</b>	82,0
<b>m<sup>3</sup></b>	192
<b>kg/h</b>	1,9
<b>Dim. WxHxD</b>	695x495x450
<b>kg</b>	149
<b>Ø mm</b>	160 T
<b>W</b>	34

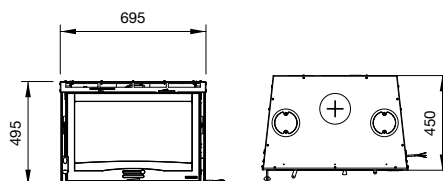


## INSERTO 70 L 4.0 - VENTILATO A



<b>kW-N</b>	7,8
<b>%</b>	79,1
<b>m<sup>3</sup></b>	223
<b>kg/h</b>	2,3
<b>Dim. WxHxD</b>	695x550x450
<b>kg</b>	128
<b>Ø mm</b>	160 T
<b>W</b>	34



# CAST IRON / CRYSTAL / WIDE INSERTS FOR WOOD-BURNING




## INSERTO 70 4.0 - VENTILATO

A



<b>kW-N</b>	7,8
<b>%</b>	79,1
<b>m<sup>3</sup></b>	223
<b>kg/h</b>	2,3
<b>Dim. WxHxD</b>	695x550x450
<b>kg</b>	142
<b>Ø mm</b>	160 T
<b>W</b>	34




## INSERTO 80 CRYSTAL EVO 2.0 - VENTILATO

A+



<b>kW-N</b>	7,4
<b>%</b>	83,9
<b>m<sup>3</sup></b>	212
<b>kg/h</b>	2,1
<b>Dim. WxHxD</b>	800x555x500
<b>kg</b>	130
<b>Ø mm</b>	160 T
<b>W</b>	40

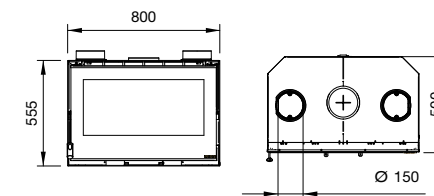


## INSERTO 80 HIGH PRESSURE

A+



<b>kW-N</b>	7,9
<b>%</b>	82,4
<b>m<sup>3</sup></b>	226
<b>kg/h</b>	2,3
<b>Dim. WxHxD</b>	800x555x520
<b>kg</b>	128
<b>Ø mm</b>	160 T
<b>W</b>	50

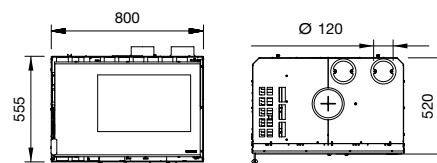


## INSERTO 80 PRS CRYSTAL - VENTILATO

A+




<b>kW-N</b>	8,3
<b>%</b>	87,4
<b>m<sup>3</sup></b>	237
<b>kg/h</b>	2,2
<b>Dim. WxHxD</b>	800x916x500
<b>kg</b>	150
<b>Ø mm</b>	160 T
<b>W</b>	40

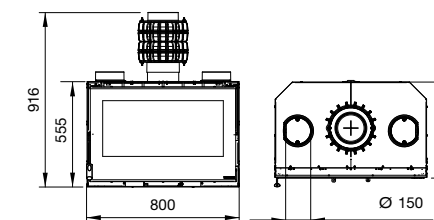



# CAST IRON / CRYSTAL / WIDE INSERTS FOR WOOD-BURNING




## INSERTO 70 WIDE

A+



<b>kW-N</b>	7,5
<b>%</b>	80,7
<b>m<sup>3</sup></b>	215
<b>kg/h</b>	2,2
<b>Dim. WxHxD</b>	704x561x506
<b>kg</b>	140
<b>Ø mm</b>	160 T

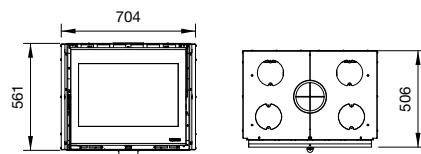


## INSERTO 70 PRS WIDE

A+



<b>kW-N</b>	8,1
<b>%</b>	86,1
<b>m<sup>3</sup></b>	232
<b>kg/h</b>	2,2
<b>Dim. WxHxD</b>	704x1051x506
<b>kg</b>	158
<b>Ø mm</b>	160 T

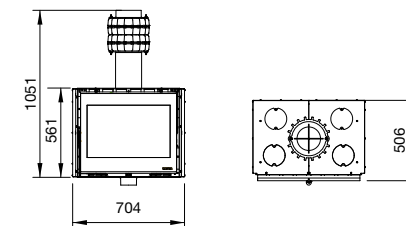


## INSERTO 80 WIDE 2.0

A+



<b>kW-N</b>	8,0
<b>%</b>	82,1
<b>m<sup>3</sup></b>	229
<b>kg/h</b>	2,3
<b>Dim. WxHxD</b>	800x561x509
<b>kg</b>	150
<b>Ø mm</b>	160 T

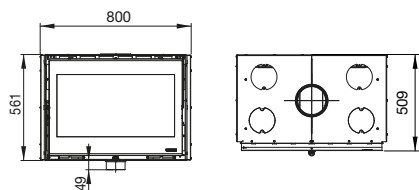


## INSERTO 100 WIDE


A+




<b>kW-N</b>	8,1
<b>%</b>	81,0
<b>m<sup>3</sup></b>	232
<b>kg/h</b>	2,3
<b>Dim. WxHxD</b>	1000x561x509
<b>kg</b>	178
<b>Ø mm</b>	160 T



# MONOBLOCKS



THE IDEAL SOLUTION FOR YOUR FIREPLACE

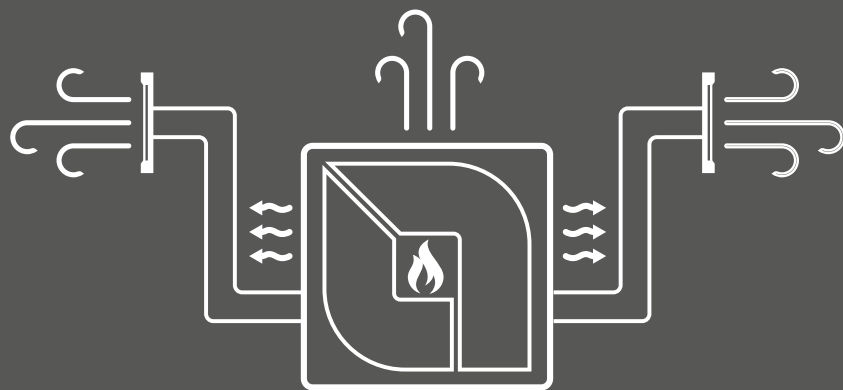


## MONOBLOCCO 800 ANGOLO DX

A+



<b>kW-N</b>	10,0
<b>%</b>	80,9
<b>m<sup>3</sup></b>	287
<b>kg/h</b>	2,9
<b>Dim. WxHxD</b>	879x1570-1605x612
<b>kg</b>	271
<b>Ø mm</b>	200 T

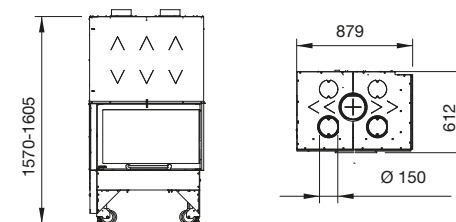


## MONOBLOCCO 800 ANGOLO SX


A+




<b>kW-N</b>	10,0
<b>%</b>	80,9
<b>m<sup>3</sup></b>	287
<b>kg/h</b>	2,9
<b>Dim. WxHxD</b>	879x1570-1605x612
<b>kg</b>	271
<b>Ø mm</b>	200 T

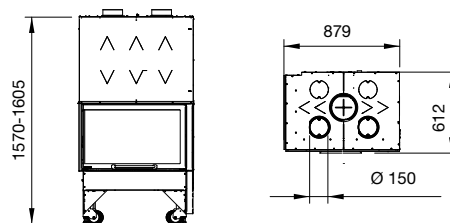

# WOOD-BURNING CLOSED FIREPLACES



THE IDEAL SOLUTION FOR YOUR FIREPLACE

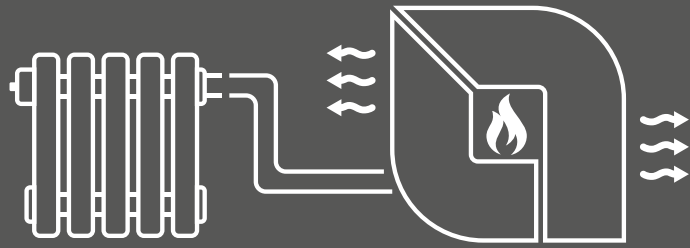


## TERMOCAMINO WF PLUS DSA

A+



<b>kW-N</b>	20,5
<b>kW-H<sub>2</sub>O</b>	11,3
<b>%</b>	85,5
<b>m<sup>3</sup></b>	587
<b>kg/h</b>	5,4
<b>Dim. WxHxD</b>	846x1585-1625x667
<b>kg</b>	334
<b>Ø mm</b>	200 T

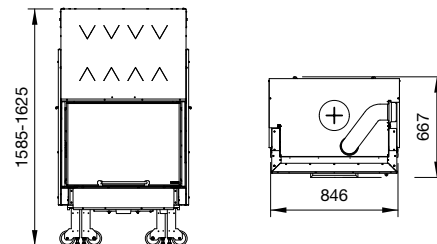

W  
O  
O  
D

PRESTIGE

Line

PERFECT SYMBIOSIS

OF DESIGN

AND WARMTH



**A+** | 7,5 kW-N | 215 m<sup>3</sup>

## CHARACTERISTICS



## TECHNICAL DATA

**Nominal power**  
7,5 kW-N

**Efficiency**  
86,5 %

**Hourly consumption**  
2,0 kg/h

**Dimensions (WxHxD)**  
528x1127x490 mm

**Net weight**  
170 kg

**Smoke outlet diameter (Ø)**  
130 mm T

**Hearth opening size (WxH)**  
270 x 375 mm

**Hearth size (WxHxD)**  
295 x 420 x 310 mm

**Wood length (max)**  
30 cm

## TECHNOLOGY



## ECODESIGN

Download  
Technical Sheet



SCAN ME



## COLOUR CHOICES

External facing in majolica



Bordeaux

White Infinity



Internal facing of the hearth in cast iron and Nordiker

# LIÙ - PIETRA

Wood burning stove

PRESTIGE

Line

**A+** | 7,5 kW-N | 215 m<sup>3</sup>

## CHARACTERISTICS



## ECODESIGN

Download  
Technical Sheet



SCAN ME



## TECHNICAL DATA

**Nominal power**  
7,5 kW-N

**Efficiency**  
86,5 %

**Hourly consumption**  
2,0 kg/h

**Dimensions (WxHxD)**  
528 X 1107 X 508 mm

**Net weight**  
201 kg

**Smoke outlet diameter (Ø)**  
130 mm T

**Hearth opening size (WxH)**  
270 x 375 mm

**Hearth size (WxHxD)**  
295 x 429 x 310 mm

**Wood length (max)**  
30 cm

## TECHNOLOGY



## COLOUR CHOICES

Finish in natural stone carved from a single block



Natural stone



Internal facing of the hearth in cast iron and Nordiker

N.B. Enameled cast iron, when used correctly, has almost an unlimited life and requires minimal maintenance.

# TAHITI

Cast iron wood burning stove

PRESTIGE

Line

**A+** | 7,7 kW-N | 220 m<sup>3</sup>

## CHARACTERISTICS



## TECHNICAL DATA

**Nominal power**  
7,7 kW-N

**Efficiency**  
81,8 %

**Hourly consumption**  
2,2 kg/h

**Dimensions (WxHxD)**  
746 x 894 x 483 mm

**Net weight**  
150 kg

**Smoke outlet diameter (Ø)**  
150 mm T

**Hearth opening size (WxH)**  
532 x 212 mm

**Hearth size (WxHxD)**  
585 x 290 x 255 mm

**Wood length (max)**  
50 cm

## TECHNOLOGY



## ECODESIGN

Download  
Technical Sheet



SCAN ME



## COLOUR CHOICES

Finish entirely in enamelled cast iron



Anthracite black



Front and side loading door

N.B. Enameled cast iron, when used correctly, has almost an unlimited life and requires minimal maintenance.

# TAHITI EPS


Wood stove with heat recovery system

PRESTIGE

Line

**A+** | 8,0 kW-N | 229 m<sup>3</sup>

## CHARACTERISTICS

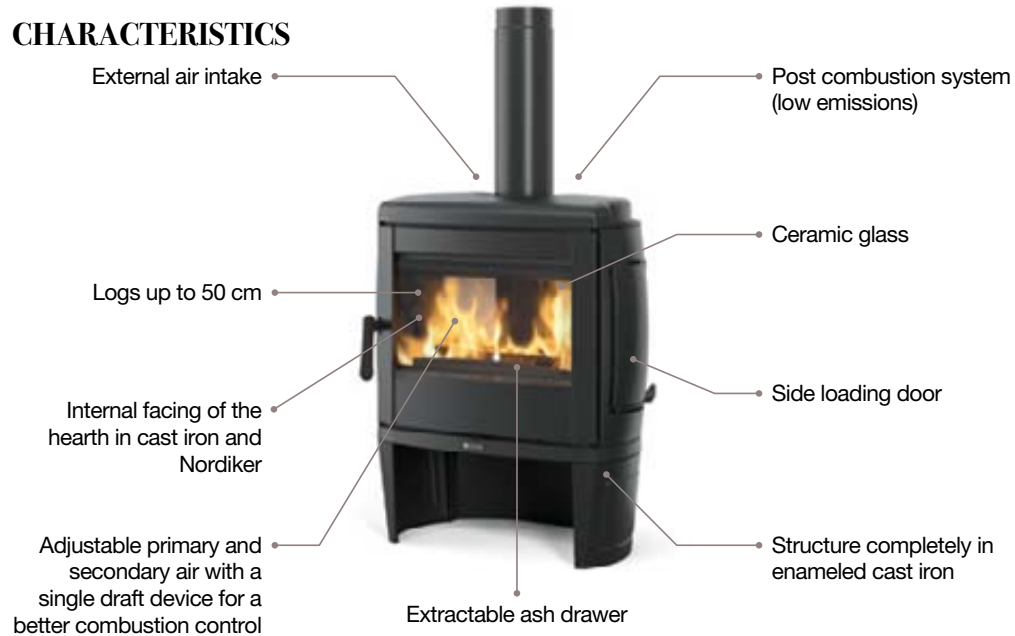

## TECHNICAL DATA

**Nominal power**  
8,0 kW-N

**Efficiency**  
87,6 %

**Hourly consumption**  
2,2 kg/h

**Dimensions (WxHxD)**  
746 x 1373 x 483 mm

**Net weight**  
154 kg

**Smoke outlet diameter (Ø)**  
150 mm T

**Hearth opening size (WxH)**  
532 x 212 mm

**Hearth size (WxHxD)**  
585 x 290 x 255 mm

**Wood length (max)**  
50 cm

## TECHNOLOGY



## ECODESIGN

Download  
Technical Sheet



SCAN ME




## COLOUR CHOICES

Finish entirely in enamelled cast iron



Anthracite black



## STANDARD EQUIPMENT - TAHITI EPS



**EPS System**  
Model with heat recovery system



Front and side loading door



# DANTE


Wood stove with heat recovery system

PRESTIGE

Line

**A+** | 8,8 kW-N | 252 m<sup>3</sup>

## CHARACTERISTICS

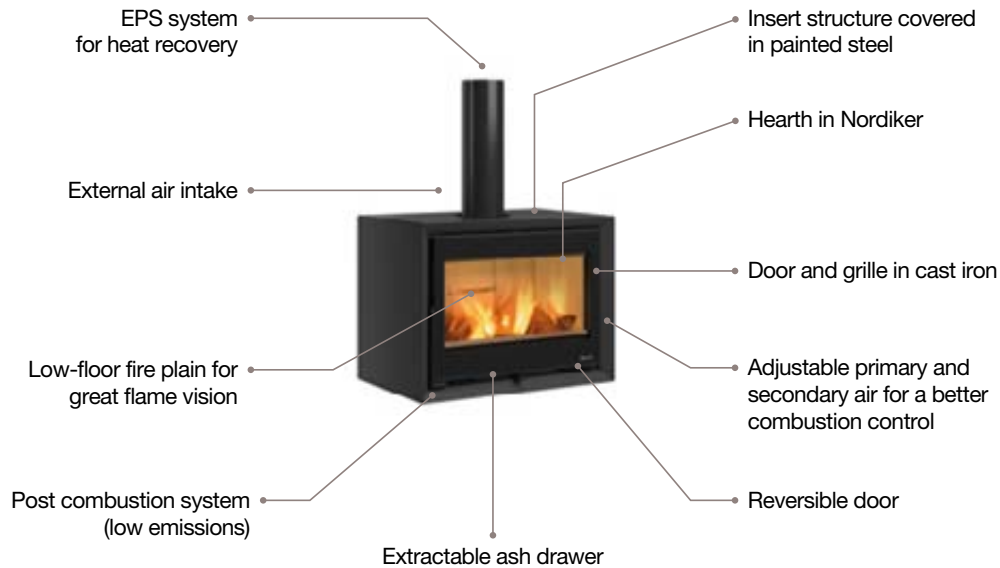

## ECODESIGN

Download  
Technical Sheet



SCAN ME



## TECHNICAL DATA

**Nominal power**  
8,8 kW-N

**Efficiency**  
85,5 %

**Hourly consumption**  
2,4 kg/h

**Dimensions (WxHxD)**  
822 x 1055 x 550 mm

**Net weight**  
158 kg

**Smoke outlet diameter (Ø)**  
160 mm T

**Hearth opening size (WxH)**  
626 x 278 mm

**Hearth size (WxHxD)**  
652 x 295 x 350 mm

**Wood length (max)**  
30 cm

## TECHNOLOGY



Hearth in Nordiker



Post combustion



Doors in cast iron



Glass cleaning system



Direct outdoor air intake (BBC)

## COLOUR CHOICES

High temperature painted steel covering - Matte black

**DANTE WITH BENCH (optional element)**  
Examples of combinations



**Dimensions with bench (LxHxD)**

1490 x 1525 x 540 mm

## STANDARD EQUIPMENT



**EPS System**  
Model with heat recovery system

## OPTIONAL



**Bench Matte black**  
LxHxD 1490x470x540 mm  
53,5 Kg

# DANTE CON PORTALEGNA

Wood stove with heat recovery system

PRESTIGE

Line

**A+** | 8,8 kW-N | 252 m<sup>3</sup>

## CHARACTERISTICS



## TECHNICAL DATA

**Nominal power**  
8,8 kW-N

**Efficiency**  
85,5 %

**Hourly consumption**  
2,4 kg/h

**Dimensions (WxHxD)**  
822 x 1480 x 553 mm

**Net weight**  
183 kg

**Smoke outlet diameter (Ø)**  
160 mm T

**Hearth opening size (WxH)**  
626 x 278 mm

**Hearth size (WxHxD)**  
652 x 295 x 350 mm

**Wood length (max)**  
30 cm

## TECHNOLOGY



## ECODESIGN




Download  
Technical Sheet



SCAN ME

## COLOUR CHOICES

High temperature painted steel covering - Matte black



## STANDARD EQUIPMENT



**EPS System**  
Model with heat recovery system

# NOVA FORNO

Wood stove with oven

PRESTIGE

Line

**A+** | 11,8 kW-N | 338 m<sup>3</sup>

## CHARACTERISTICS



## TECHNICAL DATA

**Nominal power**  
11,8 kW-N

**Efficiency**  
86,4 %

**Hourly consumption**  
3,2 kg/h

**Dimensions (WxHxD)**  
559 x 1496 x 569 mm

**Net weight**  
256 kg

**Smoke outlet diameter (Ø)**  
150 mm T

**Hearth opening size (WxH)**  
315 x 285 mm

**Hearth size (WxHxD)**  
357 x 450 x 362 mm

**Oven size (WxHxD)**  
330 x 300 x 370 mm

**Wood length (max)**  
30 cm

## TECHNOLOGY



Nordiker® hearth



Post combustion



Cast iron doors



Glass cleaning system



Outdoor air intake (ASC)

## ECODESIGN

Download technical data sheet



SCAN ME



## FINISHES

Majolica cladding



Matt white



Bordeaux

## STANDARD EQUIPMENT



**ENAMELLED OVEN PAN (1 piece)**



**CHROME PLATED OVEN GRILL (1 piece)**



# NOVA FORNO - STEEL

Wood stove with oven

PRESTIGE

Line

**A+** | 11,8 kW-N | 338 m<sup>3</sup>

## CHARACTERISTICS



## TECHNICAL DATA

**Nominal power**  
11,8 kW-N

**Efficiency**  
86,4 %

**Hourly consumption**  
3,2 kg/h

**Dimensions (WxHxD)**  
559 x 1496 x 569 mm

**Net weight**  
217 kg

**Smoke outlet diameter (Ø)**  
150 mm T

**Hearth opening size (WxH)**  
315 x 285 mm

**Hearth size (WxHxD)**  
357 x 450 x 362 mm

**Oven size (WxHxD)**  
330 x 300 x 370 mm

**Wood length (max)**  
30 cm

## TECHNOLOGY



Nordiker® hearth



Post combustion



Cast iron doors



Glass cleaning system



Outdoor air intake (ASC)

## ECODESIGN

Download  
technical data sheet



SCAN ME



## FINISHES

Enamelled external steel



Anthracite black

## STANDARD EQUIPMENT



**ENAMELLED OVEN PAN (1 piece)**



**CHROME PLATED OVEN GRILL (1 piece)**



**A+** | 8,7 kW-N | 249 m<sup>3</sup>

## CHARACTERISTICS



## TECHNICAL DATA

**Nominal power**  
8,7 kW-N

**Efficiency**  
89,1 %

**Hourly consumption**  
2,3 kg/h

**Dimensions (WxHxD)**  
1050 x 865 x 670 mm  
(without food warmer)

**Net weight**  
217 kg  
(without food warmer)

**Smoke outlet diameter (Ø)**  
150 mm B/T

**Hearth opening size (WxH)**  
240 x 185 mm

**Hearth size (WxHxD)**  
270 x 287 x 455 mm

**Oven size (WxHxD)**  
436 x 418 x 430 mm

**Wood length (max)**  
30 cm

## TECHNOLOGY



Hearth in Nordiker



Post combustion



Doors in cast iron



Glass cleaning system



Direct outdoor air intake (BBC)

## ECODESIGN

Download  
Technical Sheet



SCAN ME



## COLOUR CHOICES

Finish in enamelled steel and majolica



Bordeaux



White Infinity

## STANDARD EQUIPMENT



**ENAMELLED BACKING TRAY (1 piece)**



**OVEN GRID (1 piece)**

## OPTIONAL



**FOOD WARMER**

Bordeaux - White Infinity  
Dimensions (WxHxD) 987x710x370mm  
Attention: pipe not included

# GARDENIA 5.0

Wood-burning cooker

PRESTIGE  
Line

New 2024

**A+** | 9,5 kW-N | 272 m<sup>3</sup>

## CHARACTERISTICS



## TECHNICAL DATA

**Nominal power**  
9,5 kW-N

**Efficiency**  
86,7 %

**Hourly consumption**  
2,5 kg/h

**Dimensions (WxHxD)**  
950 x 864 x 704 mm

**Net weight**  
192 kg - 212 Kg PT

**Smoke outlet diameter (Ø)**  
150 mm B/T

**Hearth opening size (WxH)**  
225 x 210 mm

**Hearth size (WxHxD)**  
296 x 306 x 460 mm

**Oven size (WxHxD)**  
307 x 418 x 430 mm

**Wood length (max)**  
30 cm

## TECHNOLOGY



Post combustion



Cast iron doors



Glass cleaning system



Outdoor air intake (ASC)

## ECODESIGN\*\*

Download  
Technical Sheet



SCAN ME



## COLOUR CHOICES

Cast iron and enamelled steel cladding



Anthracite black

Natural stone

## STANDARD EQUIPMENT



**ENAMELLED OVEN PAN (1 piece)**

**CHROME PLATED OVEN GRILL (1 piece)**

# ALASKA

Wood-burning cooker

PRESTIGE

Line

**A+** | 12,0 kW-N | 344 m<sup>3</sup>

## CHARACTERISTICS



## TECHNICAL DATA

**Nominal power**  
12,0 kW-N

**Efficiency**  
88,6 %

**Hourly consumption**  
3,2 kg/h

**Dimensions (WxHxD)**  
1307 x 860 x 705 mm

**Net weight**  
350 kg

**Smoke outlet diameter (Ø)**  
150 mm B/T

**Hearth opening size (WxH)**  
405 x 278 mm

**Hearth size (WxHxD)**  
400 x 340 x 460 mm

**Oven size (WxHxD)**  
434 x 418 x 430 mm

**Wood length (max)**  
30 cm

## TECHNOLOGY



Nordiker® hearth



Post combustion



Cast iron doors



Glass cleaning system



Direct external air inlet (BBC)

## ECODESIGN

Download  
technical data sheet



SCAN ME




## FINISHES

Cast iron and enamelled steel cladding



Glazed black



Three-ring plate

## STANDARD EQUIPMENT



**ENAMELLED OVEN PAN (1 piece)**



**STAINLESS STEEL GRILL (1 piece)**



**CHROME PLATED OVEN GRILL (1 piece)**

## OPTIONAL



**CHROME PLATED HANDRAIL AND TERMINALS**



New 2024


**A+** | 16,0\*\* kW-N | 9,0\*\* kW-H<sub>2</sub>O | 430\*\* m<sup>3</sup>

Download  
technical data sheet



SCAN ME

## CHARACTERISTICS

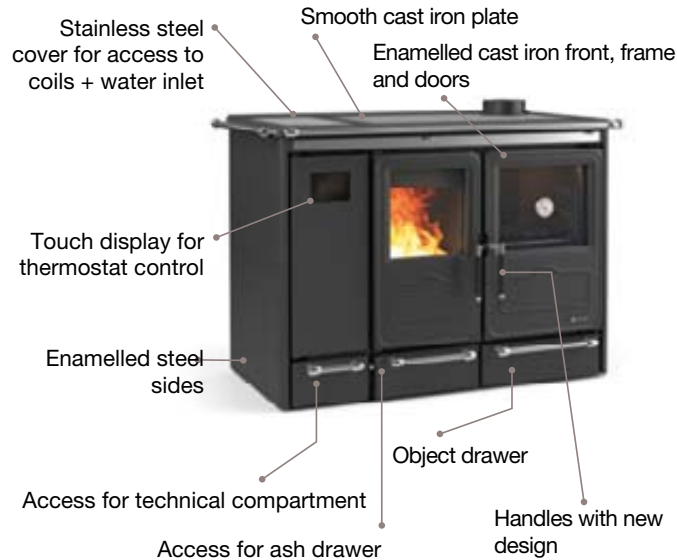

## STANDARD HYDRAULIC EQUIPMENT

- Heating circuit coil
- DHW circuit coil
- Control unit:
  - Frost protection function
  - Pump anti-seize function
- Low consumption electronic circulator for primary circuit
- Non-return valve
- Automatic venting all-purpose equipment
- DHW flow switch
- Level switch
- Sacrificial magnesium anode
- Primary circuit temperature sensor
- Fill/drain tap


## ECODESIGN\*\*



## TECHNICAL DATA

<b>Nominal power</b> 16,0 kW-N **	<b>Smoke outlet diameter (Ø)</b> 150 mm B/T/RH Side **
<b>Power given back to water</b> 9,0 H <sub>2</sub> O **	<b>Hearth opening size (WxH)</b> ** x ** mm
<b>Efficiency</b> > 85,0 % **	<b>Hearth size (WxHxD)</b> ** x ** x ** mm
<b>Hourly consumption</b> 4,1 kg/h **	<b>Oven size (WxHxD)</b> ** x ** x ** mm
<b>Dimensions (WxHxD)</b> 1251 x 861 x 725 mm	<b>Wood length (max)</b> ** cm
<b>Net weight</b> ** kg	<b>Working pressure (bar)</b> ** bar

## TECHNOLOGY




## COLOUR CHOICES

Cast iron and enamelled steel cladding



Anthracite black

## STANDARD EQUIPMENT

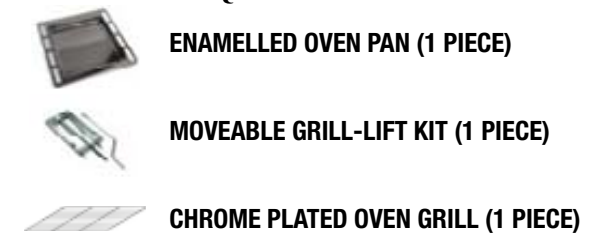




# MONOBLOCCO 3LC

Wood-burning monoblock for fireplaces



**A+** | 12 kW-N | 344 m<sup>3</sup>

## CHARACTERISTICS

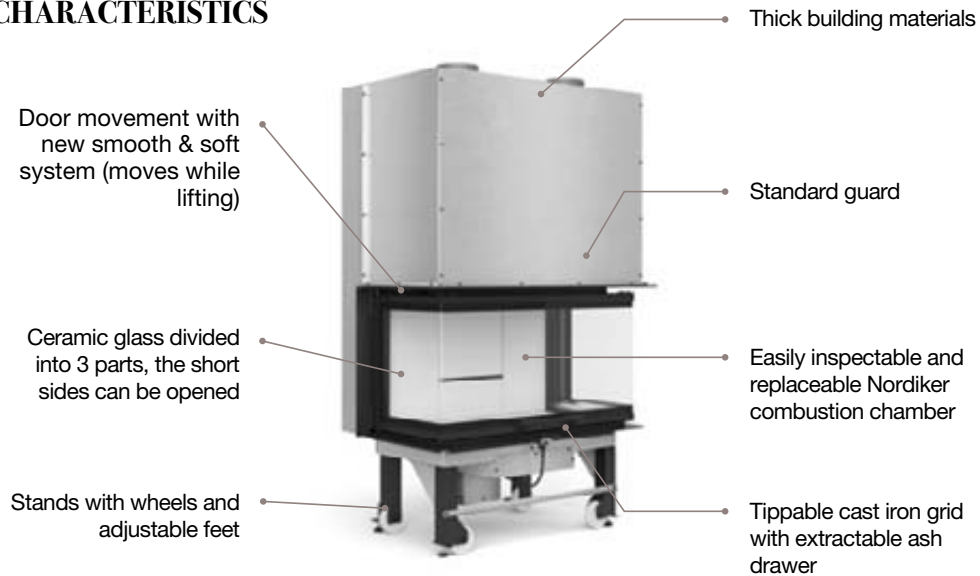

## TECHNICAL DATA

**Nominal power**  
12,0 kW-N

**Efficiency**  
82,0 %

**Hourly consumption**  
3,5 kg/h

**Dimensions (WxHxD)**  
1034 x 1642-1685 x 655 mm

**Net weight**  
320 kg

**Smoke outlet diameter (Ø)**  
200 mm

**Hearth opening size (WxH)**  
830 x 350 mm

**Hearth size (WxHxD)**  
690 x 480 x 320 mm

**Wood length (max)**  
50 cm

## TECHNOLOGY



## ECODESIGN

Download technical data sheet



SCAN ME



## FINISHES



## OPTIONAL



“Wind Air” Kit



Shade diffuser

Wave diffuser


# MONOBLOCCO 90PA 2.0

Wood-burning monoblock for fireplaces



**A+** | 13,2 kW-N | 378 m<sup>3</sup>

## CHARACTERISTICS

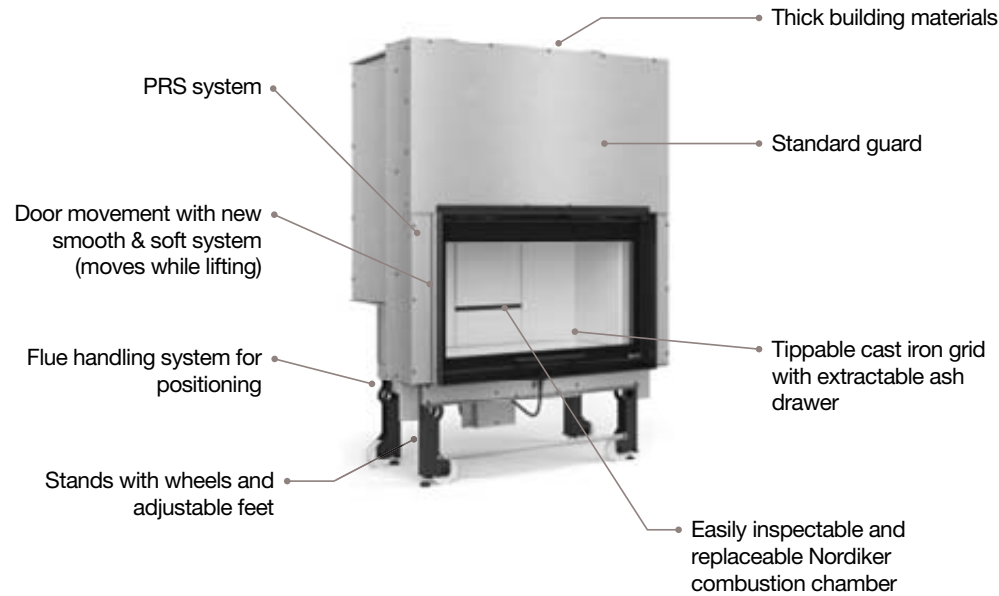

## TECHNICAL DATA

**Nominal power**  
13,2 kW-N

**Efficiency**  
85,3 %

**Hourly consumption**  
3,7 kg/h

**Dimensions (WxHxD)**  
1105 x 1590-1630 x 650 mm

**Net weight**  
320 kg


**Smoke outlet diameter (Ø)**  
180 mm

**Hearth opening size (WxH)**  
830 x 350 mm

**Hearth size (WxHxD)**  
815 x 480 x 325 mm


**Wood length (max)**  
50 cm

## TECHNOLOGY



## ECODESIGN

Download technical data sheet



SCAN ME



## FINISHES



## OPTIONAL



**Stainless steel frame kit**



**"Wind Air" Kit**



**Shade diffuser**



**Wave diffuser**

Evolution  
*LINE*

THE TOP-OF-THE-LINE PRODUCTION  
OF THE LA NORDICA-EXTRAFLAME GROUP  
FOR THE BEST RETAILERS.

DESIGN, TECHNOLOGY  
AND PERFORMANCE.



# LARISSA

Wood-burning stove with automatic combustion air control

Evolution  
*Life*

New 2024

**A+** | 8,0\*\* kW-N | 230\*\* m<sup>3</sup>

## CHARACTERISTICS



## TECHNICAL DATA

Nominal power  
8,0 kW-N \*\*

Efficiency  
> 85,0 % \*\*

Hourly consumption  
kg/h \*\*

Dimensions (WxHxD)  
628 x 1226 x 527 mm \*\*

Net weight  
kg \*\*

Smoke outlet diameter (Ø)  
130 mm B/T\*\*

Hearth opening size (WxH)  
\*\* x \*\* mm \*\*

Hearth size (WxHxD)  
\*\* x \*\* x \*\* mm \*\*

Wood length (max)  
\*\* cm\*\*


## SIMPLICITY AND SAVINGS

The electronic system regulates the input of combustion airs to optimise the various working phases of the stove:

- **Ignition** = Helps speed flame ignition by adding more primary air
- **Combustion** = Allows combustion air to be balanced while optimising efficiency: thus less consumption and emissions
- **Eco mode** = Reduces the combustion air registers in a calculated manner to maintain the heat of the embers as long as possible; this also facilitates the lighting of new wood logs in the event of recharging

**LARISSA: an easy-to-use wood stove that also saves on consumption.**

## TECHNOLOGY



## ECODESIGN\*\*



Download  
technical data sheet



SCAN ME

## COLOUR CHOICES

Enamelled cast iron cladding and painted steel sides



Anthracite black



## STANDARD EQUIPMENT

**TOUCH BUTTON WITH LED**  
(management + product status info)

**INTEGRATED NAVEL WI-FI MODULE**  
(App 'Total Control 3.0')

## OPTIONAL

**REMOTE CONTROL**  
Control with radio-controlled "hand-held" device, with thermostat function






**Glass cleaning system**  
A system of pre-heated air which removes any deposit from the fire-door glass.



**Extractable burn pot for easy cleaning**  
The burn pot's system of construction allows easy extraction for quick and complete cleaning.



**Auto-adjustment of the fumes extractor (encoder)**  
It keeps the RPM of the fumes motor constant, to ensure correct combustion of the product.




**Hearth in Nordiker**  
La Nordica-Extrafame uses a special material called Nordiker for the production of hearth walls refractories.



**Post combustion**  
The combustion system developed by La Nordica-Extrafame allows, due to a secondary/tertiary air system, a post combustion which significantly reduces emissions.



**Hopper safety thermostat**  
Ensure always high safety standard, preventing the overheating of the product in case of anomaly.



**1<sup>st</sup> and 2<sup>nd</sup> air auto-balancing**  
Primary and secondary air electronically balanced for an optimal combustion and thermal efficiency.



**Outdoor temperature thermostat input**  
The product interfaces with room temperature control devices (thermostat or contacts) to achieve the selected temperature in every room.



**Doors in cast iron**  
The high-quality cast-iron doors are made to last and ensure perfect sealing at all times.



**Automatic safety device**  
It is a safety device created to quickly reduce water temperature, according to rules in force. DSA valve not included.



**Air-tight seal test at 50 Pa (100% of the products)**  
All the air-tight products, or even those that have some "air-tight" components (like the hopper), are tested under high pressure at the end of the production line to ensure their safety and optimal performance.



**Flue pipe safety pressure switch**  
Checks the correct evacuation of the fumes and, in case of need, locks the loading of pellets, to avoid problems on the generator.



**Chrono-thermostat**  
Chronothermostat provided with temperature control divided in four daily slots for an optimal rooms management.



**Glass cleaning system**  
A system of pre-heated air which removes any deposit from the fire-door glass.



**Direct outdoor air intake (BBC)**  
Air intake system which draws fresh air from outside directly into the adjust system combustion regulation of the firebox of the appliance.



**Auto-relighting after black-out**  
Following a black out the appliance automatically re-starts after having carried out the scheduled auto-control.



**Room temp. thermostat**  
The room probe optimizes comfort and lowers noticeably the consumption.



**Clean combustion**  
Increases the combustion efficiency and the duration of parts subject to wear duration reducing at the same time the ordinary brazier cleaning.



**Outdoor air intake (ASC)**  
A particular connection system which allows to introduce air from the outside into the pre-heated environment around the fire-box.



**Radiant system (PRS)**  
High efficiency Heat exchanger system

# LIST OF FUNCTIONS OF PELLET PRODUCTS

## EASY SETUP

The *Easy Setup* function allows the user to easily configure the stove so that it can operate as efficiently as possible with most types of pellets available on the market. It ensures optimum performance in terms of yield for each type of pellet.

## EASY CONTROL

In order to function, a stove must be connected to a system that has a flue and an external air inlet. Not all systems are the same as they depend on the physical characteristics of the building in which they are used: consequently, the operating conditions of the stove can vary considerably depending on the system itself. Thanks to the Easy Control function, the stove operates under optimal conditions even in difficult situations, minimising unwanted effects such as condensation and poor combustion, and it can also help to keep the glass of the stove door cleaner.

## FLOW PERFORMANCE CONTROL (FPC)

The FPC system keeps the supply of combustion air constant at all times, thus ensuring that combustion characteristics remain the same. In this way, maximum stove efficiency is achieved even when the system conditions (stove+flue pipe) change.

## AUTOMATIC

The stove accurately and continuously regulates the power output in order to reach and maintain the temperature set by the user. This translates into improved thermal and acoustic comfort and reduced consumption.

## AIR ZONE CONTROL (AZC)

The Air Zone Control feature is exclusive to products with a dedicated motor for ducting. The AZC function ensures maximum heat output to the ducting when the room in which the stove is installed has reached the set temperature. Therefore, in this mode, maximum comfort is achieved in the ducted area and consumption is significantly reduced when the set temperature is reached in the main room.

## PRO AIR SETUP

New setup for ventilation mappings. It allows the user to choose between 4 different room ventilation modes:  
Off = Fan off. N.B. Mode only available for models that have this setting option.  
Quiet = Fan speed is reduced for noise reduction (compared to Regular).  
Regular = Default configuration.  
Boost = Fan speed is increased compared to Regular in order to maximise ventilation air flow.

## INTEGRAZIONE DOMOTICA "ALEXA"

With this extra feature, the stove can be controlled via the "Alexa" (Amazon) voice assistant. This operation requires an Internet connection + the new Total Control 3.0 app: therefore, the product must have the "Grey" module or have this function integrated in the board/display set up for the 3.0. app.

# MAKING THE RIGHT CHOICE

Think of the environment, even in your own home

When you decide to buy a wood burning range, a fireplace, a boiler or a wood or pellet burning stove, a series of factors influence your choice. La Nordica-Extraflame has provided this tool to help you find what you need.

## 1 Flue Pipe

Should be considered as the main element for smoke disposal. It must be built with material able to resist to high temperature, better with a circular shape, and 4 meters as minimal height without bends.

## 2 Connection Pipe flue


Appliance flue connection pipe must be shortest, with few horizontal parts as possible and with the same diameter of the collar pipe appliance connection.

## 3 Air Intake

It should be checked as correct appliance installation if do exist an external air intake big enough to offer a whole and efficient combustion.


## 4 Chimney

Put on the top, it must have the same internal section of the chimneypot, while the exit one must be twice compared to the flue pipe diameter to guarantee the residual combustion disposals and protecting against environment.



## 5 Canalization

It is always important to assess the maximum air-ductable distances of the installed product.



## 6 Thermo products

By choosing what thermo product to install, specific individual needs have to be considered in addition to a meticulous assess of the global thermal power needed by the heating system and of the installation place.



## 7 Heatable m³

The data is indicative. For the generator to be sized correctly, contact a skilled technician/designer. The total volume to heat, the thermal building insulation grade, the sun exposure and the climatic zone have to be determined in order to make the



best choice about the fireplace or stove to install. This is the only way to quantify the environmental needed heat.

Nominal power kW	m <sup>3</sup> to heat
5 - 8	150 - 200 circa
8 - 12	200 - 300 circa
12 - 20	300 - 500 circa

Referred to the need of 30 kcal/h x m<sup>3</sup>





# PELLET PRODUCTS INDEX

Page no.	Article description	DM186	CT 2.0 (Coefficiente premiante)	Flamme Verte	DTA	BlmSchV	15a B-VG	Ecodesign
3	AMIKA	★★★★	1,5	7★	✓	✓	✓	✓
6	ANNABELLA AD EVO	★★★★	1,5	7★		✓	✓	✓
11	COMFORT IDRO L80	★★★★	1,5	7★		✓	✓	✓
10	COMFORT P70 AIR	★★★★	1,5	7★		✓	✓	✓
10	COMFORT P70 AIR H49	★★★★	1,5	7★		✓	✓	✓
11	COMFORT P70 AIR PLUS	★★★★	1,5	7★		✓	✓	✓
11	COMFORT P85	★★★★	1,5	7★		✓	✓	✓
11	COMFORT P85 PLUS	★★★★	1,5	7★		✓	✓	✓
9	COSTANZA IDRO	★★★★	1,5	7★		✓	✓	✓
4	DAHIANA VFS	★★★★	1,5	7★		✓	✓	✓
6	DAHIANA PLUS VFS	★★★★	1,5	7★		✓	✓	✓
10	DIADEMA IDRO EVO	★★★★	1,5	7★		✓	✓	✓
2	GIUSY EVO 2.0	★★★★	1,5	7★		✓	✓	✓
5	GIUSY PLUS EVO 2.0	★★★★	1,5	7★		✓	✓	✓
9	ISIDE IDRO H15	★★★★	1,5	7★		✓	✓	✓
2	KETTY EVO 2.0	★★★★	1,5	7★		✓	✓	✓
3	KLAUDIA	★★★★	1,5	7★		✓	✓	✓
5	KLAUDIA PLUS	★★★★	1,5	7★		✓	✓	✓
4	LUCIA	★★★★	1,5	7★		✓	✓	✓
7	LUCIA PLUS	★★★★	1,5	7★		✓	✓	✓
2	LUISELLA	★★★★	1,2	7★		✓	✓	✓
5	MARILENA PLUS AD	★★★★	1,5	7★	✓	✓		✓
6	MARILENA PLUS AD CRYSTAL	★★★★	1,5	7★	✓	✓		✓
8	MARINA IDRO H11	★★★★★	1,5	7★		✓	✓	✓
8	MARINA IDRO H13	★★★★★	1,5	7★		✓	✓	✓
12	PK15	★★★★★	1,5	7★		✓	✓	✓
12	PK20	★★★★★	1,5	7★		✓	✓	✓
12	PK30	★★★★★	1,5	7★		✓	✓	✓
9	RAFFAELLA IDRO H15	★★★★	1,5	7★		✓	✓	✓
9	RAFFAELLA IDRO H18	★★★★	1,5	7★		✓	✓	✓
3	SERAFINA LUX EVO	★★★★	1,5	7★		✓	✓	✓
3	SERAFINA PETRA EVO	★★★★	1,5	7★		✓	✓	✓
7	SOUVENIR LUX EVO	★★★★	1,5	7★		✓	✓	✓
6	SOUVENIR STEEL EVO	★★★★	1,5	7★		✓	✓	✓
7	SOUVENIR PETRA EVO	★★★★	1,5	7★		✓	✓	✓
4	TEODORA EVO	★★★★	1,5	7★		✓	✓	✓
4	TEOREMA	★★★★	1,5	7★		✓	✓	✓
7	TEOREMA PLUS	★★★★	1,5	7★		✓	✓	✓
8	VIRNA IDRO	★★★★	1,2	7★		✓	✓	✓

# PELLET PRODUCTS INDEX

Page no.	Article description	DM186	CT 2.0 (Coefficiente premiante)	Flamme Verte	DTA	BImSchV	15a B-VG	Ecodesign
<b>PRESTIGE LINE</b>								
22	ANGELA EVO	★★★★	1,5	7★	✓	✓	✓	✓
27	ANGELA PLUS EVO	★★★★	1,5	7★	✓	✓	✓	✓
19	ANGY TOP	★★★★	1,5	7★	✓	✓	✓	✓
25	DEBBY	★★★★	1,5	7★	✓	✓	✓	✓
30	DEBBY PLUS EVO	★★★★	1,5	7★	✓	✓	✓	✓
29	GABRIELLA PLUS	★★★★	1,5	7★	✓	✓	✓	✓
21	ILARY	★★★★	1,5	7★	✓	✓	✓	✓
28	ILARY PLUS TOP	★★★★	1,5	7★	✓	✓	✓	✓
16	LINA TOP	★★★★	1,5	7★	✓	✓	✓	✓
20	MIRKA	★★★★★	1,5	7★		✓	✓	✓
26	MIRKA PLUS	★★★★★	1,5	7★		✓	✓	✓
18	MOIRA EVO	★★★★	1,5	7★	✓	✓	✓	✓
23	PAMELA STEEL	★★★★	1,5	7★	✓	✓	✓	✓
24	PAMELA CRYSTAL	★★★★	1,5	7★	✓	✓	✓	✓
15	<b>PEGGY</b>				** Provisional data in phase of homologation			
33	ROSANNA IDRO	★★★★	1,5	7★		✓	✓	✓
17	SABRY 5.0	★★★★★	1,5	7★		✓	✓	✓
31	SHARON PLUS	★★★★	1,5	7★	✓	✓	✓	✓
32	SHARON PLUS STEEL	★★★★	1,5	7★	✓	✓	✓	✓

# PELLET PRODUCTS INDEX

Page no.	Article description	DM186	CT 2.0 (Coefficiente premiante)	Flamme Verte	DTA	BImSchV	15a B-VG	Ecodesign
<b>EVOLUTION LINE</b>								
43	<b>ANNALISA PLUS</b>				** Provisional data in phase of homologation			
51	EVELYNE IDRO 2.0	★★★★	1,5	7★		✓	✓	✓
50	GUENDA IDRO	★★★★	1,5	7★		✓	✓	✓
52	ISIDORA IDRO H16	★★★★	1,5	7★		✓	✓	✓
53	ISIDORA IDRO H20	★★★★	1,5	7★		✓	✓	✓
54	ISIDORA IDRO H23 5.0	★★★★★	1,5	7★		✓	✓	✓
38	KATIA 11	★★★★	1,5	7★	✓	✓	✓	✓
37	KATIA 9	★★★★	1,5	7★	✓	✓	✓	✓
48	<b>MARGARET</b>				** Provisional data in phase of homologation			
36	MIETTA EVO	★★★★	1,5	7★	✓	✓	✓	✓
40	NORIS	★★★★★	1,5	7★	✓	✓	✓	✓
41	NORIS LUX	★★★★★	1,5	7★	✓	✓	✓	✓
44	NORIS PLUS	★★★★★	1,5	7★	✓	✓	✓	✓
45	NORIS PLUS LUX	★★★★★	1,5	7★	✓	✓	✓	✓
56	PR20	★★★★★	1,5	7★		✓	✓	✓
57	PR30	★★★★★	1,5	7★		✓	✓	✓
39	SINFONY	★★★★	1,5	7★	✓	✓	✓	✓
46	TERRY PLUS	★★★★	1,5	7★	✓	✓	✓	✓

# WOOD-BURNING PRODUCTS INDEX

Page no.	Article description	DM186	CT 2.0 (Coefficiente premiante)	Flamme Verte	BlmSchV	15a B-VG	Ecodesign
65	ASIA BII	★★★★		7★	✓	✓	✓
62	BRIGITTA GB	★★★★		7★	✓	✓	✓
62	CANDY 4.0	★★★★	1,5	7★	✓	✓	✓
61	CONCITA 2.0	☆☆☆☆☆	1,5	7★	✓	✓	✓
61	CONCITA 2.0 - STEEL	☆☆☆☆☆	1,5	7★	✓	✓	✓
60	EMILIANA	☆☆☆☆☆	1,5	7★	✓	✓	✓
60	EMILIANA - STEEL	☆☆☆☆☆	1,5	7★	✓	✓	✓
66	ESTER BII	★★★★		7★	✓	✓	✓
66	ESTER FORNO EVO	★★★★	1,5	7★	✓	✓	✓
70	FAMILY 4,5	★★★★		7★	✓	✓	✓
60	FEDORA	☆☆☆☆☆	1,5	7★	✓	✓	✓
61	FEDORA - STEEL	☆☆☆☆☆	1,5	7★	✓	✓	✓
66	GEMMA	★★★★		7★	✓	✓	✓
66	GEMMA FORNO 5.0	☆☆☆☆☆	1,5	7★	✓	✓	✓
62	GIULIETTA X 4.0	★★★★		7★	✓	✓	✓
80	INSERTO 100 WIDE	★★★★		7★	✓	✓	✓
78	INSERTO 60 4.0 - VENTILATO	★★★★		7★	✓	✓	✓
79	INSERTO 70 4.0 - VENTILATO	★★★★		7★	✓	✓	✓
78	INSERTO 70 H49 4.0 - VENTILATO	★★★★		7★	✓	✓	✓
78	INSERTO 70 L 4.0 - VENTILATO	★★★★		7★	✓	✓	✓
80	INSERTO 70 PRS WIDE	★★★★	1,5	7★	✓	✓	✓
80	INSERTO 70 WIDE	★★★★	1,5	7★	✓	✓	✓
79	INSERTO 80 CRYSTAL EVO 2.0 - VENTILATO	★★★★		7★	✓	✓	✓
79	INSERTO 80 HIGH PRESSURE	★★★★		7★	✓	✓	✓
79	INSERTO 80 PRS CRYSTAL - VENTILATO	★★★★	1,2	7★	✓	✓	✓
80	INSERTO 80 WIDE 2.0	★★★★		7★	✓	✓	✓
63	ISETTA CON CERCHI EVO 4.0	★★★★		7★	✓	✓	✓
63	ISETTA EVO 4.0	★★★★		7★	✓	✓	✓
64	ISOTTA CON CERCHI EVO	★★★★		7★	✓	✓	✓
64	ISOTTA FORNO EVO	★★★★	1,5	7★	✓	✓	✓
64	ISOTTA EVO	★★★★		7★	✓	✓	✓
63	JENNIFER 2.0	★★★★		7★	✓	✓	✓
69	LORIET S DSA	★★★★	1,2		✓	✓	✓
63	MARLENA	★★★★	1,5	7★	✓	✓	✓
81	MONOBLOCCO 800 ANGOLO DX	★★★★		7★	✓	✓	✓
81	MONOBLOCCO 800 ANGOLO SX	★★★★		7★	✓	✓	✓
69	NORMA S IDRO DSA	★★★★			✓		✓
72	ROSA 5.0 - CERAMICA	☆☆☆☆☆		7★	✓	✓	✓
73	ROSA 5.0 - MAIOLICA	☆☆☆☆☆		7★	✓	✓	✓



# WOOD-BURNING PRODUCTS INDEX

Page no.	Article description	DM186	CT 2.0 (Coefficiente premiante)	Flamme Verte	BImSchV	15a B-VG	Ecodesign
73	ROSA 5.0 - PETRA	☆☆☆☆☆		7★	✓	✓	✓
73	ROSA 5.0 - STEEL	☆☆☆☆☆		7★	✓	✓	✓
74	ROSA L 5.0 - STEEL	☆☆☆☆☆		7★	✓	✓	✓
72	ROSA REVERSE 2.0	★★★★		7★	✓	✓	✓
72	ROSA SINISTRA REVERSE	☆☆☆☆☆		7★	✓	✓	✓
74	ROSA XXL 5.0 - MAIOLICA	☆☆☆☆☆		7★	✓	✓	✓
74	ROSA XXL 5.0 - PETRA	☆☆☆☆☆		7★	✓	✓	✓
74	ROSA XXL 5.0 - STEEL	☆☆☆☆☆		7★	✓	✓	✓
70	ROSETTA 5.0 - CERAMICA	☆☆☆☆☆		7★	✓	✓	✓
71	ROSETTA 5.0 - MAIOLICA	☆☆☆☆☆		7★	✓	✓	✓
71	ROSETTA 5.0 - PETRA	☆☆☆☆☆		7★	✓	✓	✓
71	ROSETTA SINISTRA 5.0 - CERAMICA	☆☆☆☆☆		7★	✓	✓	✓
71	ROSETTA SINISTRA 5.0 - PETRA	☆☆☆☆☆		7★	✓	✓	✓
72	ROSETTA SINISTRA 5.0 - STEEL	☆☆☆☆☆		7★	✓	✓	✓
67	ROSSELLA PLUS FORNO EVO	★★★★	1,5	7★	✓	✓	✓
67	ROSSELLA R1 BII	★★★★		7★	✓	✓	✓
70	SOVRANA EASY EVO 2.0	★★★★		7★	✓	✓	✓
65	SUPER JUNIOR	★★★★		7★	✓	✓	✓
73	SUPREMA 4.0	☆☆☆☆☆		7★	✓	✓	✓
65	TEA	★★★★		7★	✓	✓	✓
82	TERMOCAMINO WF PLUS DSA	★★★★	1,5	7★	✓	✓	✓
68	TERMOISOTTA DSA	★★★★			✓		✓
77	TERMOROSA DSA	★★★		7★	✓	✓	✓
77	TERMOROSA XXL DSA	★★★★		7★	✓	✓	✓
68	TERMOROSSELLA PLUS EVO DSA 4.0	★★★★	1,5	7★	✓	✓	✓
68	TERMOROSSELLA PLUS FORNO DSA 4.0	★★★★	1,5	7★	✓	✓	✓
77	TERMOVRANA DSA	★★★		7★	✓	✓	✓
76	VENEZIA	☆☆☆☆☆		7★	✓	✓	✓
75	VERONA XXL	★★★★		7★	✓	✓	✓
75	VERONA XXL - MAIOLICA	★★★★		7★	✓	✓	✓
76	VERONA XXL - PETRA	★★★★		7★	✓	✓	✓
75	VICENZA EVO	★★★★		7★	✓	✓	✓

# WOOD-BURNING PRODUCTS INDEX

Page no.	Article description	DM186	CT 2.0 (Coefficiente premiante)	Flamme Verte	BlmSchV	15a B-VG	Ecodesign
<b>PRESTIGE LINE</b>							
	ALASKA	☆☆☆☆☆		7★	✓	✓	✓
	DANTE	★★★★	1,5	7★	✓	✓	✓
	DANTE CON PORTALEGNA	★★★★	1,5	7★	✓	✓	✓
	<b>GARDENIA 5.0</b>	☆☆☆☆☆		7★	✓	✓	✓
	LIÙ	★★★★	1,5	7★	✓	✓	✓
	LIÙ - PIETRA	★★★★	1,5	7★	✓	✓	✓
	MILLY	★★★★		7★	✓	✓	✓
	MONOBLOCCO 3LC	★★★★		7★	✓	✓	✓
	MONOBLOCCO 90PA 2.0	☆☆☆☆☆	1,5	7★	✓	✓	✓
	NOVA FORNO	☆☆☆☆☆	1,5	7★	✓	✓	✓
	NOVA FORNO - STEEL	☆☆☆☆☆	1,5	7★	✓	✓	✓
	<b>SIERRA</b>			** Provisional data in phase of homologation			
	TAHITI	★★★★		7★	✓	✓	✓
	TAHITI EPS	★★★★	1,5	7★	✓	✓	✓
<b>EVOLUTION LINE</b>							
	LARISSA			** Provisional data in phase of homologation			

# CERTIFICATES



Italian Regulation for the Environmental Certificate release of domestic solid fuels biomass room heaters (Classification from 1 up to 5 stars).

**BlmSchV**

German regulations on controlling emissions.



Only for Italy: the Ministerial Decree 28/12/12, better known as “Conto Termino”, allows a specific incentive in case of replacement of old appliances by new ones with certain characteristics

**15a B-VG**

Compliance with article 15 of the Austrian federal constitutional law on environmental protection measures.



French trademark of the ADEME agency for the environment and the energy. The products “Flamme Verte” approved guarantee the best high energy performances and respect for the environment.

**ECODESIGN**

European certification defining the ecodesign guidelines for biomass products.



Certification issued by the French Scientific and Technical Building Centre – CSTB – for watertight devices tested in watertight installation conditions.

**MFB**

Only for Germany: The products is ready to be connected to a multiply chimney connection , just when the installation is made in accordance with requirements of the regional and national standards, and when observed the norms DIN EN 13384-2, DIN V 1816-1, DIN 18896 and MFeuV-2007 (Muster-Feuerungsverordnung), and that the district chimney sweeper has checked and approved the correct installation.



Certification issued by the German Federal Office for Economics and Export Control to promote the efficient use of biomass energy.

# LEGEND, ENERGY LABEL, COLOURS AND NOTE

## LEGEND

**kW-N:** Nominal thermal power (kW)  
**kW-H<sub>2</sub>O:** Power given back to water (kW)  
**m<sup>3</sup>:** Heatable m<sup>3</sup> (30 kcal/h x m<sup>3</sup>)  
**%:** Efficiency (%)  
**kg/ℓ:** Tank total capacity (kg-l)  
**kg/h:** Hourly consumption (kg/h)  
**Ø mm:** Smoke outlet diameter (mm)  
 T = Top  
 B = Back  
 RH Side = Right side  
 LH Side = Left side

**Dim. WxHxD:** Dimensions WxHxD (mm)  
**kg:** Net weight (kg)  
**W:** Electric consumption (W)  
**bar:** Working pressure (bar)  
**Oven capacity:** Oven size (l)




**AIR-TIGHT:** Air-tight combustion chamber and tank: technology and innovation at the service of your safety.

## ENERGY LABEL

### The energy label for the biomass products.

From 1st January 2018 the Energy Labelling Regulation comes into force also for all the biomass heating appliances, both roomheater appliances and appliances designed to heat the water for central heating and domestic hot water. This directive, in accordance with the regulations of the European Union, will assign an Energy Efficiency Class (from G up to A++) providing the buyers with information about the consumption and the efficiency.



## COLOURS

AVOR	Ivory
AGAT	Agate Grey
BIAN	White
BIIN	White Infinity
BIPU	Dotted White
BORD	Bordeaux
BRNZ	Bronze
BRWN	Brown
CAPP	Cappuccino
FUME	Smoked
GRLC	Grigio Luce
INOX	Inox
MASF	Soft Brown

NEVT	Glazed Black
NERO	Black
NEAN	Anthracite Black
PANN	Panna
PERG	Parchment
NATU	Natural Stone
SVAM	Silk Vogue Ametista
TITA	Titanium
TOMA	Matt Taupe
TORT	Taupe
VERD	Green
VGAM	Amethyst
VLCN	Vulcan

## NOTE

**Note:** Before the purchase, ask to your reseller all the information regarding the appliance. One must also bear in mind all laws and national, regional, provincial and town council Standards present in the country in which the appliance has been installed, as well as the instructions contained in this manual.

- The images contained in this document are for product illustration purposes only and do not represent indications for the performance or technical characteristics of the same.
- La Nordica products must be connected to chimneys having a draught between 10 Pa and 17 Pa as indicated by the instruction manual which is supplied along with any product. The Thermoproducts must be connected to chimneys with a draught between 17 Pa and 20 Pa.
- Due to printing reasons the reproduction of colours has to be considered only indicative.
- The fuel quantity (weight) inside the tank and the hour consumption can change depending on the type of pellet which is used.
- All the figures were measured using approved pellets in compliance with EN ISO 17225-2.
- The data in the catalogue can be rounded off to the first decimal.
- Facing tones and characteristics are subject to slight variations because they are natural products.

- The manufacturer reserves the right to modify products without giving advance notice.
- The La Nordica-Extraflame products can be covered by industrial property rights (such as patents, designs and trademarks) owned by La Nordica-Extraflame exclusively. It is strictly forbidden to violate these rights as for removing, cancelling or corrupting the trademarks impressed on the products and impressing others.
- Due to its nature, natural stone material, such as marble, is subject to aesthetic variations in shade, colour and grain pattern when comparing one piece to another and also to a sample. Therefore, any differences are to be considered particular characteristics and distinctive elements of the material itself that certify the uniqueness, which is the absolute value of this type of product.
- La Nordica-Extraflame products are approved to work with 230V 50Hz power supply only. The use with different voltages and / or frequencies supply can compromise the functionality and safety of the products.





**FEELING COSY AT HOME**  
*A natural choice*

**NORDICA<sup>®</sup>**  
**Extraflame**  
Warms up your life.





**La Nordica S.p.A.** (Wood products)

Via Summano, 104 • 36030 Montecchio Precalcino - Vicenza - Italy

Tel. +39 0445 804000

info@lanordica.com

**Extraflame S.p.A.** (Pellet products)

Via dell'Artigianato, 12 • 36030 Montecchio Precalcino - Vicenza - Italy

Tel. +39 0445 865911

info@extraflame.it

[www.lanordica-extraflame.com](http://www.lanordica-extraflame.com)

9300222-001

